


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

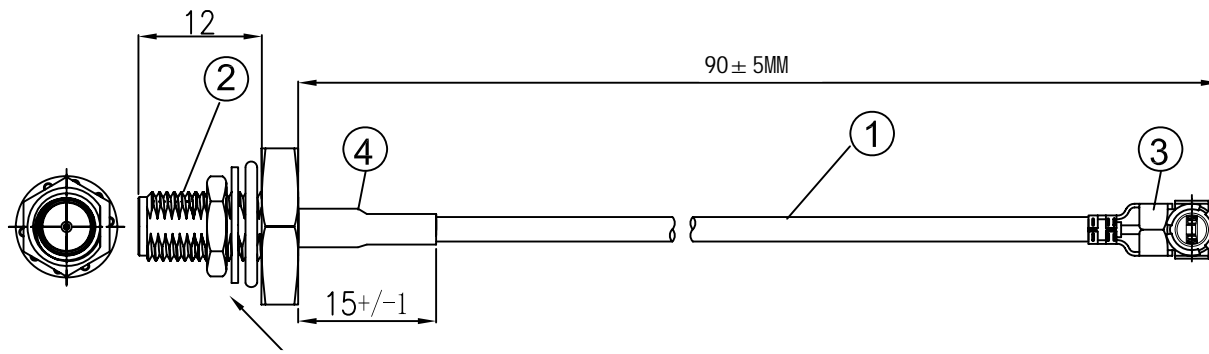

Three components are delivered with accessories (Waterproof ring washers and nut)

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
③	Terminal	High-quality Copy I-PEX 1.13 Terminal, gold-plating	1
②	Joint	RP-SMA-K, Split-type, 11 Screws, Gold-plating	1
①	Coaxial Cable	RF 1.13 Gray Cable, OD:1.13mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.

WWW.BDS666.COM

Model: **KH-FS90-SMA11L**

0755-83044319

ALL DIMENSION ARE IN MM

DRAWN Jamy DATE 2018 /09 /24


COMPUTER GENERATED IN SOLIDWORKS

ENG. _____

DO NOT SCALE THIS DRAWING

MFG. _____

Q.A. _____



GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX
± 1° ± 0.3 ± 0.25 ± 0.150

IPEX 1.13 TO SMA Waterproof RP-SMA with 11 screws L-90MM

SIZE Number

B

REV

A

CUSTOMER P/N:

SCALE: Free

TYPE

SHEET 1 OF 1