
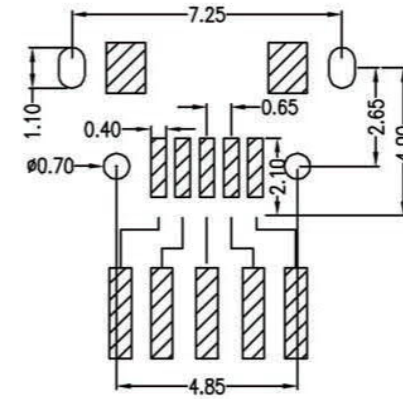



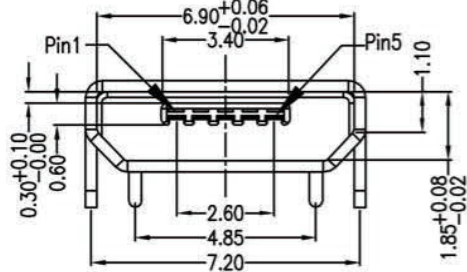
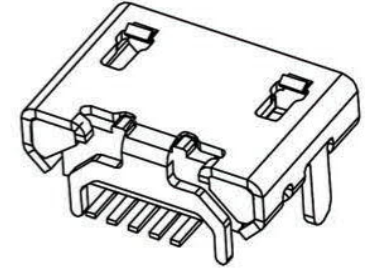


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

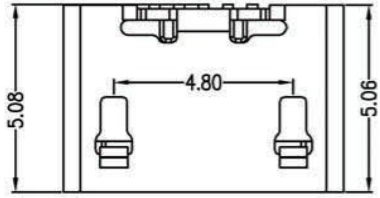

Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.15mm
- 1.3 Shell: copper alloy,t=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 50 mW Max.
- 2.4 Insulation resistance: 100 MW Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extraction cycles
- 2.7 Temperature range: -30°C~80°C

A 01 S B X X X X X X X 1-067

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

- ① 产品代号 A:成品
- ② 产品系列 01:micro usb 5pin
- ③ 产品类别 S:母座
- ④ 产品类型 B:B TYPE
- ⑤ 外壳材质 1:C2680R-H
- 8.Housing Material: 0:黄材;1: NI100v";2:黑Ni100v";3:黑+Au1u" (圆);4:全Au1u"
- 7.Terminal Material 4:C5191R-EH 2:C2680R-EH
- 8.Terminal Plating: 0:黄材;1:全Au1u";2:全Au1.5u";3:全Au1u";4:全Au1u";5:全Au1u";6:全Au1u";7:黑+Au1u";8:黑+Au1u";9:黑+Au1u";10:黑+Au1u";11:黑+Au1u";12:黑+Au1u";13:黑+Au1u"
- 9.Body material: 1:LCP
- 10.Body color: B.Black W.White
- 11.Packaging method: 1:Blister tube 2.Tape winding 3.PC winding
- 12.Type of lower plate: 1:DIP
- 13.Detail flow: 007:MICRO USB 5S B TYPE 四脚全插(牛角型)短针

PART NO: A01SBXXXXXXX1-067		MATERIAL: SEE NOTE	SHENZHEN KINGHELM ELECTRONIC CO., LTD	WWW.BDS666.COM
MODEL NO: XX		FINISH: SEE NOTE	KH-MICRO5P-N	0755-83044319
UNIT: MM	SIZE: A4	COLOR: SEE NOTE	TITLE: MICRO USB 5S B TYPE 四脚全插(牛角型)短针	
TOLERANCE UNSPECIFIED		DR: Xia Youhong	DWG NO: A067	REV: A
.x	0.25	CHK:	SCALE: 5:1	DATE: 2012.05.02
.xx	0.15	APP:		
.xxx	0.10			
Ang.	2°			