
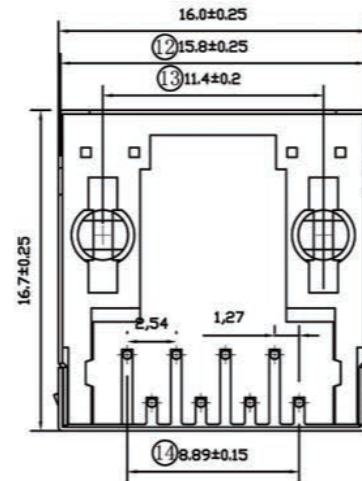


P.C.B Reference drawing

Thickness of 1.6mm is recommended

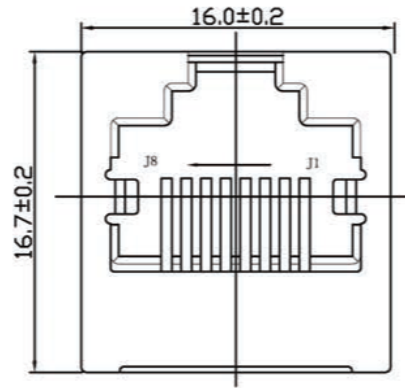

Parameters:

1. Rated Voltage、 Current: 125V/1. 5A max
2. Contact Resistance: 40m Max
3. Insulation Resistance: 500M Min
4. Test Conditions: AC1000V/0.5mA for 1 minute
5. Salt spray test: 8±0.5H
6. Soldering Temp: 260±5 3±0. 5s

Other Requirements

1. There shall be free from wrong packing, missing parts, etc;
2. The surface of parts shall be free of cracks, lack of materials, flash etc, and the coating on the surface shall be bright and artistic
3. The unspecified dimensional tolerance shall be calculated as ±0.15mm

Material requirements

1. Base: PA66 Black
2. Shielded: H62 Copper
3. Signal pin: Phosphor copper, gold plating

| | |
|---------------------------|--|
| Issuing department | |
| Administration Department | |
| Business department | |
| Purchasing Department | |
| Engineering department | |
| QC Department | |
| Production department | |

| | | | | | | | |
|-----------|-------------------|-------------------------|----------|-----------------------|------|---------------|---------------|
| | | | | View | | | |
| Mark | Number of Revised | Revised Document Number | | Signature | Date | Drawing Mark | Weight Scale |
| Designed | LI PANJIN | Date | 13.09.24 | Standardization | Date | | |
| Proofread | | Date | | Examined and approved | Date | | |
| Craft | | Date | | | | | |
| Checked | WANG XIAOFENG | Date | 13.09.24 | | | Page in Total | Page in Total |

| | |
|--|---------------|
| SHENZHEN KINGHELM ELECTRONIC CO., LTD. | |
| WWW.BDS666.COM | 0755-83044319 |
| Network socket | |
| Model: KH-5224-8P8C | |