| REV | CONTENT | CHK | DATE |
|---|---|---|---|
| V0.0 | CONTENT | SK | 2014/08/19 |

Kinghelm®

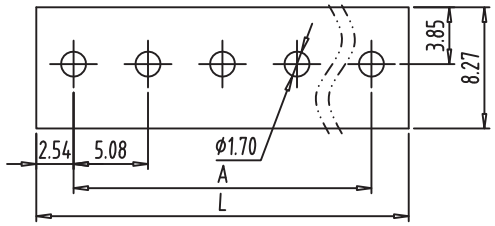


PCB LAYOUT
S=2:1

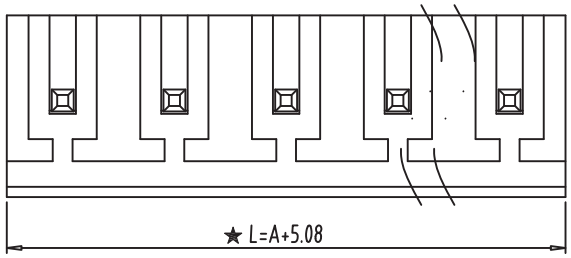


NOTES:
1. Rating:300V 15A ;
2. Insulation Withstands Voltage:
   AC2000V/MIN
3. Insulation Resistance:
   500MΩ or more at DC500V
4. Using Temperature Range: -40°C~+105°C
5. "★" is the important dimension
6. RoHS compliance

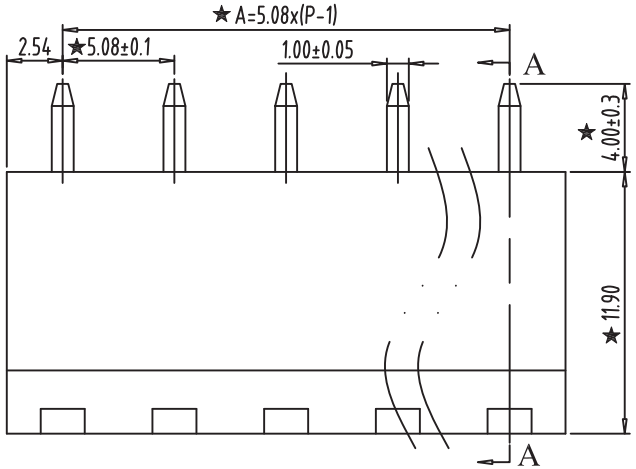


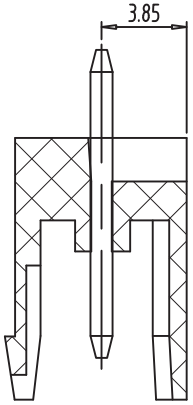


SECTION:A-A

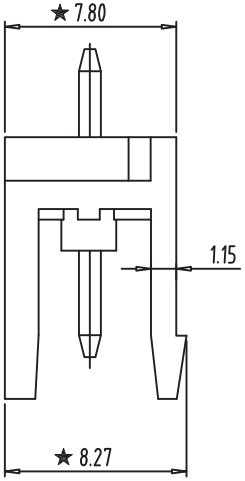


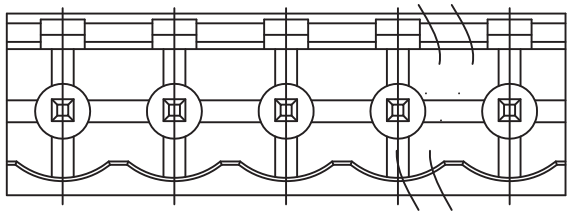

| Total Pitch Tolerances in mm | | | | | | | | | Nominal dimension range in mm | | | | | | | | | ⊥ | | ≒ | — | | // |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| over 0 to 30 | over 30 to 53 | over 53 to 70 | over 70 to 90 | over 90 to 115 | over 115 to 150 | over 150 to 250 | over 250 to 350 | over 350 to 500 | over 0 to 30 | over 30 to 53 | over 53 to 70 | over 70 to 90 | over 90 to 115 | over 115 to 150 | over 150 to 200 | over 200 to 250 | over 250 to 320 | over 0 to 10 | over 10 | all | over 0 to 100 | over 100 to 150 | over 150 |
| ±0.18 | ±0.20 | ±0.25 | ±0.3 | ±0.35 | ±0.44 | ±0.60 | ±0.70 | ±0.85 | ±0.20 | ±0.25 | ±0.30 | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.80 | ±0.90 | 0.2 | 0.3 | 0.3 | 0.2 | 0.3 | 0.5 |

| ITEM | NAME OF PART | NO. OF PART | Q"TY | MATERIAL | | | NOTE | |
|---|---|---|---|---|---|---|---|---|
| DWG. | SK | DATE 2014/08/19 | SIZE | A4 | UNITS | mm | SHEET/OF | 1 / 1 |
| CHK. | | DATE | SCALE | 3:1 | | | 2EDG-5.08 | |
| APP. | | DATE | NAME | | | | | |
| SHENZHEN KINGHELM ELECTRONIC CO., LTD. | | | WWW.BDS666.COM | | | | | |
| KH-F400V-3P-5.08G | | | 0755-83044319 | | | | | |