
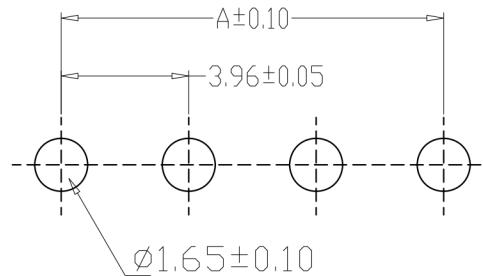


SPECIFICATIONS

- 1、Current Rating: 7A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance:  $20\text{m}\Omega$  Max
- 5、Insulation Resistance:  $1000\text{M}\Omega$  Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0  
PIN Brass Tin-plated

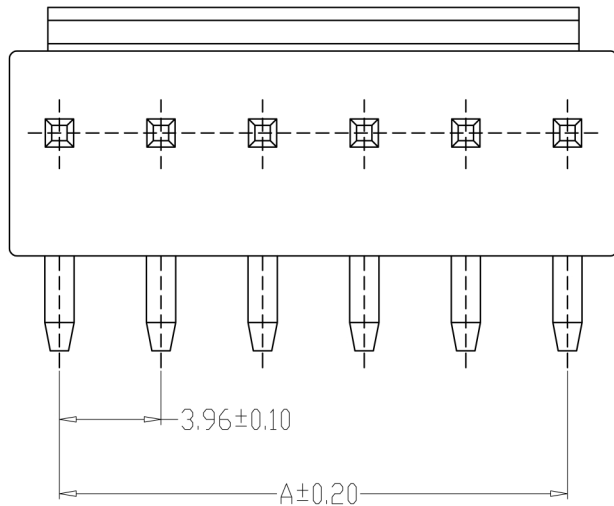

PCB LAYOUT

No.	Unit (mm)	
	A	B
A3961-02AW	3.96	7.92
A3961-03AW	7.92	11.88
A3961-04AW	11.88	15.84
A3961-05AW	15.84	19.80
A3961-06AW	19.80	23.76
A3961-07AW	23.76	27.72
A3961-08AW	27.72	31.68
A3961-09AW	31.68	35.64
A3961-10AW	35.64	39.60
A3961-11AW	39.60	43.56
A3961-12AW	43.56	47.52

DRAWN	DESCRIPTION	DATE	GENEERL TOLERANCE		DRAWN	2013, 07, 01	PART NO.	A3961-NAW		REV.	A
			X.±0.25	X.'±2'	CHECKE D	2013, 07, 03	TITLE	WAFER DIP TYPE		SHEET	1/1
			.X±0.20	.X'±1'	APPROVE D	2013, 07, 05	CUTM. NO.	Model: KH-VH-2P-W			
			.XX±0.15	.XX'±0.5'			SHENZHEN KINGHELM ELECTRONIC CO., LTD				
			.XXX±0.10	.XXX'±0.5'	UNITS	MM	SCALE	1:1		WWW.BDS666.COM 0755-83044319	