
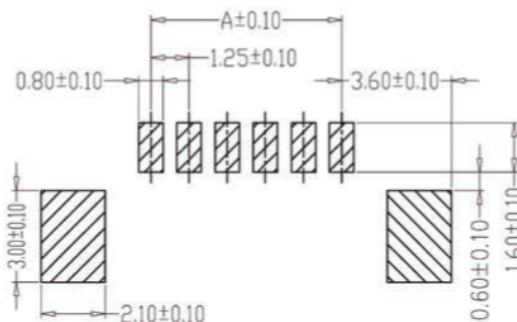


Model: KH-A1251LF-(02-20)A

### SPECIFICATIONS

- 1、 Current Rating: 1A AC, DC
- 2、 Voltage Rating: 125V AC, DC
- 3、 Temperatuer Range:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、 Contact Resistance:  $20\text{m}\Omega$  Max
- 5、 Insulation Resistance:  $100\text{M}\Omega$  Min
- 6、 Withstanding Voltang: 500V AC/minute
- 7、 Material: Wafer LCP, UL94V-0  
PIN Brass Tin-plated  
Solder tad Brass Tin-plated

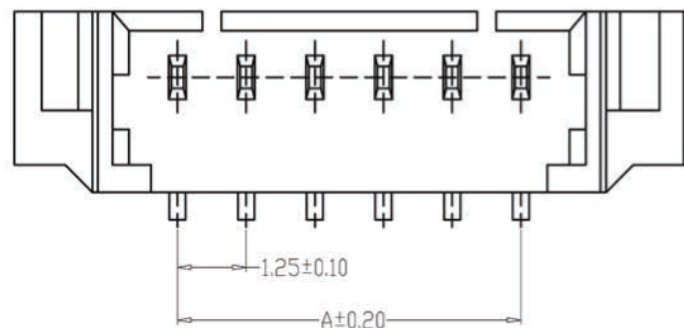

### PCB LAYOUT

NO.	mm	
	A	B
A1251LF-02A	1.25	7.35
A1251LF-03A	2.50	8.60
A1251LF-04A	3.75	9.85
A1251LF-05A	5.00	11.10
A1251LF-06A	6.25	12.35
A1251LF-07A	7.50	13.60
A1251LF-08A	8.75	14.85
A1251LF-09A	10.00	16.10
A1251LF-10A	11.25	17.35
A1251LF-11A	12.50	18.60
A1251LF-12A	13.75	19.85
A1251LF-20A	23.75	29.85

DRAWN	DESCRIPTION	DATE	GENEERL TOLERANCE		DRAWING	HE JUNJU	PART NO.	REV.	A
			X. $\pm 0.25$	X. $^{\circ} \pm 2^{\circ}$	CHECK	2013、07、01			
			.X $\pm 0.20$	.X $^{\circ} \pm 1^{\circ}$	APPROVAL	LAI JIREN	TITLE	1.25 DIP	SHEET 1/1
			.XX $\pm 0.15$	.XX $^{\circ} \pm 0.5^{\circ}$		2013、07、03	WAVE SMT TYPE		
			.XXX $\pm 0.10$	.XXX $^{\circ} \pm 0.5^{\circ}$	UNITS	ZHANG SONGQIANG	CUTM. NO.		
						2013、07、05			
					MM		SHENZHEN KINGHELM ELECTRONIC CO., LTD.	WWW.BDS666.COM	
					SCALE			KH-A1251LF-03A	
					1:1			0755-83044319	