Kinghelm®

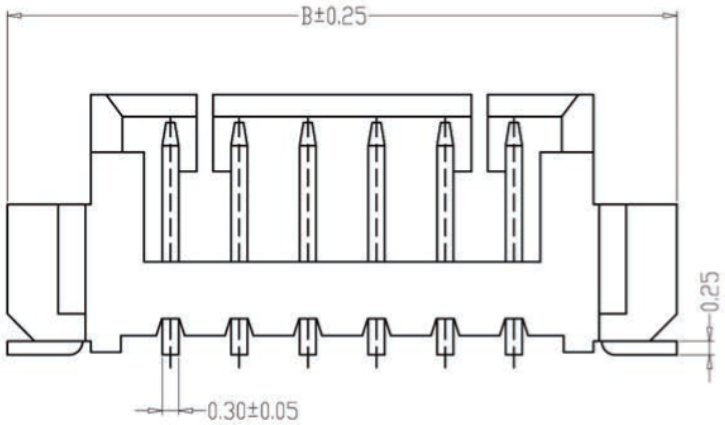

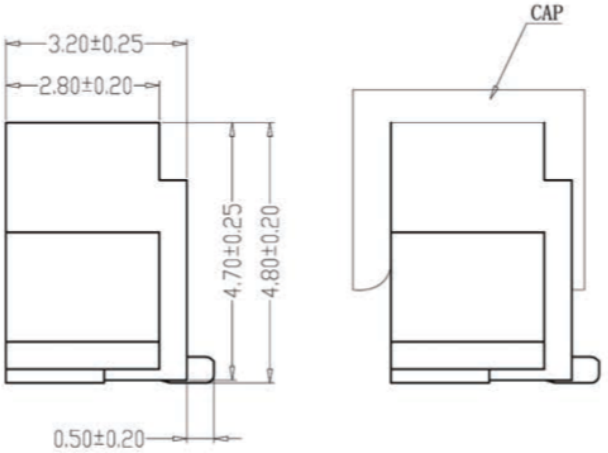

Model：KH-A1251LF-(02-20)A

SPECIFICATIONS

1、Current Rating: 1A AC, DC
2、Voltage Rating: 125V AC, DC
3、Temperatuer Range: -25℃～+85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 100MΩ Min
6、Withstanding Voltang: 500V AC/minute
7、Material:Wafer LCP,UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

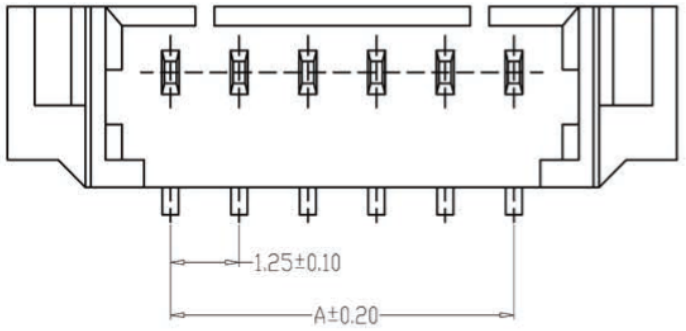

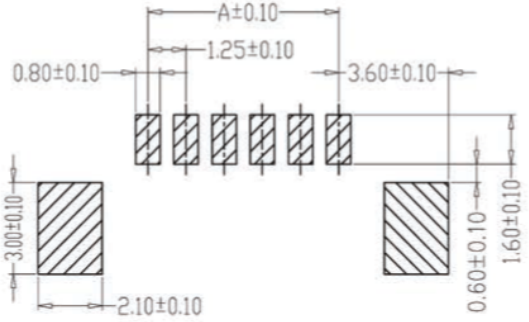

PCB LAYOUT

NO.	mm	
	A	B
A1251LF-02A	1.25	7.35
A1251LF-03A	2.50	8.60
A1251LF-04A	3.75	9.85
A1251LF-05A	5.00	11.10
A1251LF-06A	6.25	12.35
A1251LF-07A	7.50	13.60
A1251LF-08A	8.75	14.85
A1251LF-09A	10.00	16.10
A1251LF-10A	11.25	17.35
A1251LF-11A	12.50	18.60
A1251LF-12A	13.75	19.85
A1251LF-20A	23.75	29.85

DRAWN	DESCRIPTION	DATE	GENERL TOLERANCE		DRAWING	HE JUNJU 2013、07、01	PART NO.		REV.	A
			X. ±0.25	X.° ±2°	CHECK	LAI JIREN 2013、07、03	TITLE	1.25 DIP WAFE SMT TYPE	SHEET	1/1
			.X±0.20	.X° ±1°	APPROVAL	ZHANG SONGQIANG 2013、07、05	CUTM. NO.			
			.XX±0.15	.XX° ±0.5°						
			.XXX±0.10	.XXX° ±0.5°	UNITS	MM SCALE 1:1	SHENZHEN KINGHELM ELECTRONIC CO., LTD.		WWW.BDS666.COM	
							KH-A1251LF-04A		0755-83044319	