
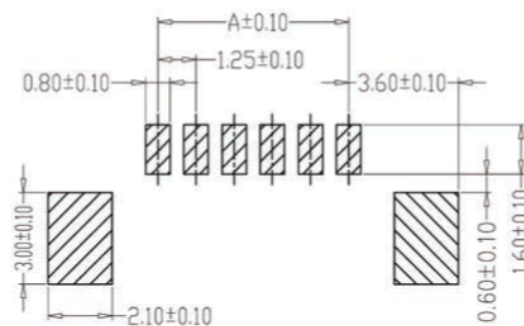


Model: KH-A1251LF-(02-20)A

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $100\text{M}\Omega$ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Wafer LCP, UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

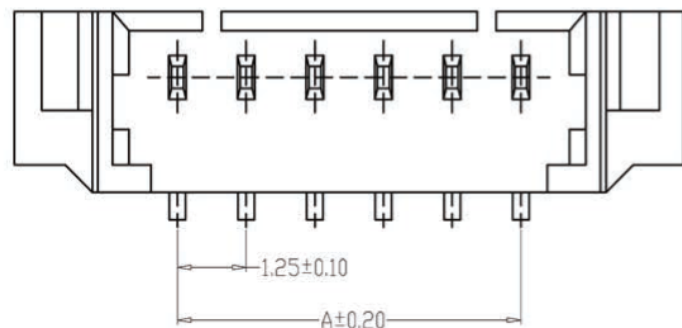

PCB LAYOUT

NO.	mm	
	A	B
A1251LF-02A	1.25	7.35
A1251LF-03A	2.50	8.60
A1251LF-04A	3.75	9.85
A1251LF-05A	5.00	11.10
A1251LF-06A	6.25	12.35
A1251LF-07A	7.50	13.60
A1251LF-08A	8.75	14.85
A1251LF-09A	10.00	16.10
A1251LF-10A	11.25	17.35
A1251LF-11A	12.50	18.60
A1251LF-12A	13.75	19.85
A1251LF-20A	23.75	29.85

DRAWN	DESCRIPTION	DATE	GENEERL TOLERANCE		DRAWING	HE JUNJU 2013、07、01	PART NO.	REV.	A	
			X. ± 0.25	X. $^{\circ} \pm 2^{\circ}$	CHECK	LAI JIREN 2013、07、03	TITLE	1.25 DIP WAFE SMT TYPE	SHEET 1/1	
			.X ± 0.20	.X $^{\circ} \pm 1^{\circ}$	APPROVAL	ZHANG SONGQIANG 2013、07、05	CUTM. NO.			
			.XX ± 0.15	.XX $^{\circ} \pm 0.5^{\circ}$	UNITS	MM	SCALE	1:1		
			.XXX ± 0.10	.XXX $^{\circ} \pm 0.5^{\circ}$	SHENZHEN KINGHELM ELECTRONIC CO., LTD.		WWW.BDS666.COM			
							KH-A1251LF-06A		0755-83044319	