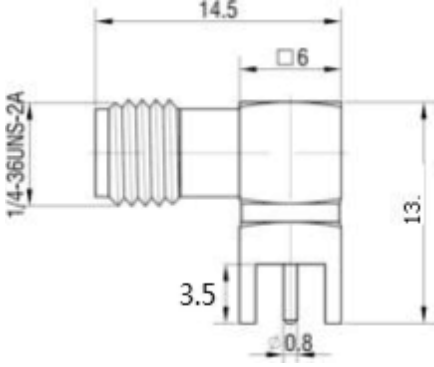



Product name	SMA curved printed panel socket	Model:	KH-SMA-K513-G
Layout: 		Mounting hole: 	
Electrical Specifications: <ol style="list-style-type: none"> Characteristic Impedance: 50 Ω Working Voltage: 335Volts rms Insulation Voltage: ≥ 1000V V.S.W.R ≤ 1.2、 3GHZ 		Frequency range : DC-18GHz <ol style="list-style-type: none"> Contact Resistance: Inner Conductor ≤ 3m Ω; Outer conductor ≤ 2.5m Ω Insulation Resistance: ≥ 5000m Ω 	
mechanical specification : 1.Separation force of inner conductor ≥ 0.28N		2.Mechanical Life: 500 times(12times/min)	
Environmental Performance: <ol style="list-style-type: none"> Environmental temperature: -55~+155 Waterproof requirements: None 		<ol style="list-style-type: none"> Relative humidity: 95% at + 40 °C 	
Materials and Surface treatment: <ol style="list-style-type: none"> Jack: Tin bronze wire QSn6.5-1 gold plating Housing: Brass Rod Hpb59-1 gold plating Insulation: PTFE 			