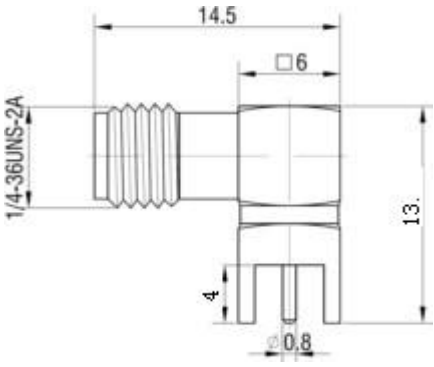
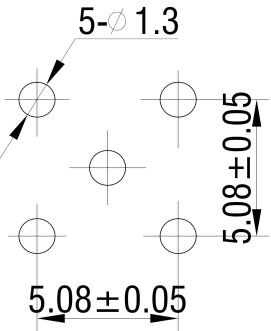


SHENZHEN KINGHELM ELECTRONIC CO., LTD.

Product name	SMA Curved printed panel socket	Model	KH-SMA-K514-N
Layout: 		Mounting Hole 	
Electrical Specifications: <ul style="list-style-type: none"> 1. Characteristic Impedance: $50\ \Omega$ 2. Working Voltage: 335Vr.m.s 3. Insulable and pressureproof $\geq 1000\text{V}$ 4. Voltage standing-wave ratio 5. Frequency range: DC-18GHz 6. Contact Resistance: Inner Conductor: $\leq 3\text{m}\ \Omega$; Outer Conductor $\leq 2.5\text{m}\ \Omega$ 7. Insulation Resistance: $\geq 5000\text{M}\ \Omega$ 			
Mechanical specification: <ul style="list-style-type: none"> 1. Inner conductor separating force: $\geq 0.28\text{N}$ 2. Mechanical Life: 500 times (12 times per minute) 			
Environmental Performance : <ul style="list-style-type: none"> 1. Ambient temperature: $-55\sim+155^\circ\text{C}$ 2. Relative humidity: +95% at 40 3. Waterproof Requirements: No 			
Material and surface treatment <ul style="list-style-type: none"> 1. Jack: Tin-bronze wire QSn6. 5-1 Nickel-Plating 2. Housing: Brass Rod Hpb59-1 Nickel-Plating 3. Insulator: PTEF (polytetrafluoroethylene) 			