


Kinghelm®

REV. NUMBER		REVISIONS		DWN	CHK	DATE
A		DESIGN				

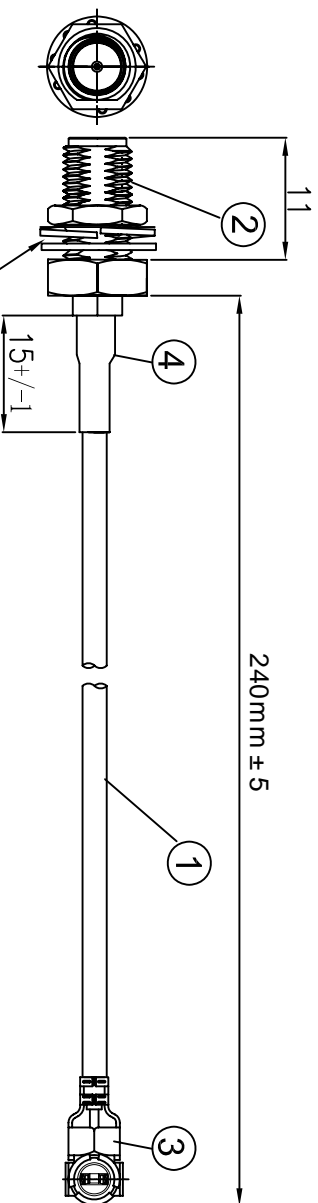

Three components are delivered with accessories (2 washers and 1 nut)

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
- 2.1. SEE TABLE
3. MECHANICAL:
- 3.1. SMA PULL FORCE: 12.0KGS.
4. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
③	Terminal	High-quality Copy I-PEX 1.13 Terminal, gold-plating	1
②	Joint	SMA-K split-type with 11 screws, gold-plating	1
①	Coaxial Cable	RF 1.13 Gray Cable, OD:1.13mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.


[WWW. BDS666. COM](http://WWW.BDS666.COM)

KHB(RG113) -240-29

0755-83044319

ALL DIMENSION ARE IN MM		DRAWN	DATE	TITLE	
ENG.	Janny	2018/05/04	RF CABLE		
COMPUTER GENERATED IN SOLIDWORKS	MFG.		I-PEX 1.13 TO SMA / F L=240 MM		
DO NOT SCALE THIS DRAWING	Q.A.				

GENERAL TOLERANCE FOR ANGLES		SIZE	TYPE	SHEET	OF
± 1°	± 0.3 ± 0.25 ± 0.150	Number	Free	1	1



CUSTOMER PIN:

A

B

C

D

A

B

C

D

A