


Kinghelm®

REV. NUMBER		REVISIONS	
REV	NUMBER	DESCRIPTION	DATE
A		DESIGN	

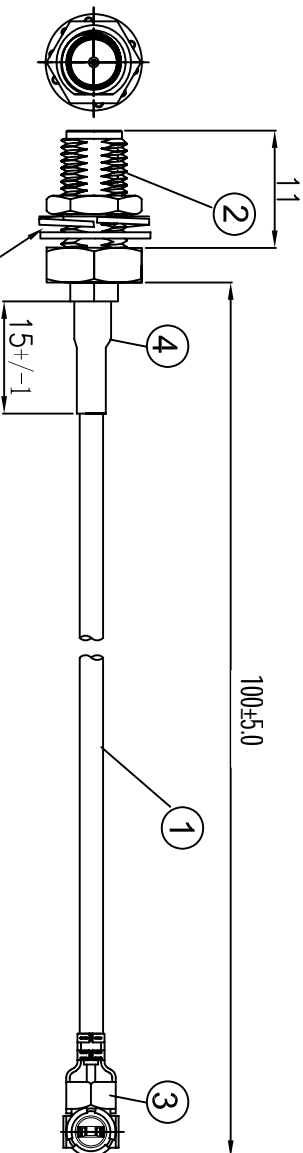

Three components are delivered with accessories (Gasket, washer and nut)

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHMMAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHMMIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
③	Terminal	High-quality Copy I-PEX Terminal I, gold-plating	1
②	Joint	SMA-K, Split-type, 11 Screws, Gold-plating	1
①	Coaxial Cable	Rg178 Brown Cable, OD:1.80mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.

WWW.BDS666.COM

KHB(RG178)-100-28

0755-83044319

I-PEX 178 TO SMA /F L=100MM

ALL DIMENSION ARE IN MM		DRAWN	DATE
		James	2019-06-01
COMPUTER GENERATED IN SOLIDWORKS		CHKD. Frank	2019-06-01
DO NOT SCALE THIS DRAWING		APPD. Scott	2019-06-01
PROJECTION		GENERAL TOLERANCE FOR ANGLES X.X ± 1° X.XX ± 0.3 X.XXX ± 0.25 X.XXXX ± 0.150	

CUSTOMER P.N.:

SIZE	Number	REV
B		A

SCALE: Free TYPE SHEET 1 OF 1

4

3

2

1

A

B

C

D

A

B

C

D