


REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

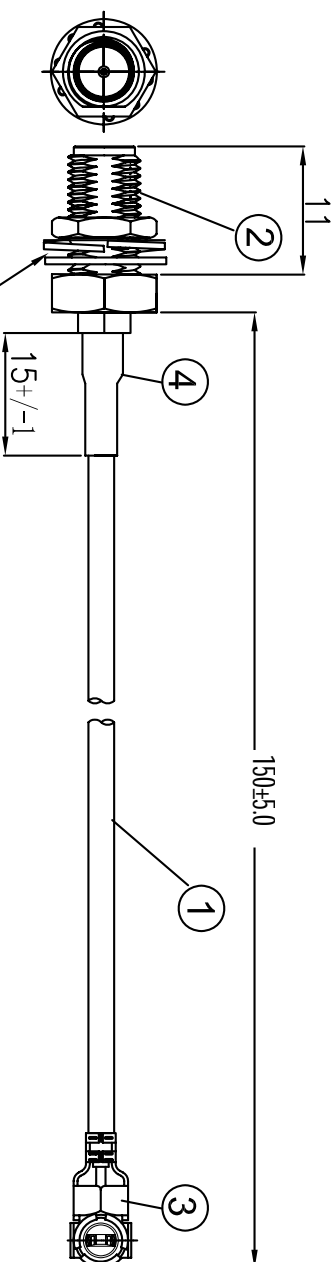

Three components are delivered with accessories (Gasket, washer and nut)

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
③	Terminal	High-quality Copy I-PEX Terminal 1, gold-plating	1
②	Joint	SMA-K, Split-type, 11 Screws, Gold-plating	1
①	Coaxial Cable	Rg178 Brown Cable, OD:1.80mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.

WWW.BDSS666.COM

KHB(RG178)-150-28

0755-83044319

I-PEX 178 TO SMA /F L=150MM

ALL DIMENSION ARE IN MM		DRAWN	James	DATE	2019-06-01
COMPUTER GENERATED IN SOLIDWORKS		CHKD.	Frank		2019-06-01
DO NOT SCALE THIS DRAWING		APPD.	Scott		2019-06-01

GENERAL TOLERANCE FOR ANGLES X.X XXX XXXX ± 1° ± 0.3 ± 0.25 ± 0.150		SIZE	Number	REV	A
PROJECTION		SCALE: Free		TYPE	

CUSTOMER P/N: