


Kinghelm®

REV. NUMBER		REVISIONS		DWN	CHK	DATE
A		DESIGN				

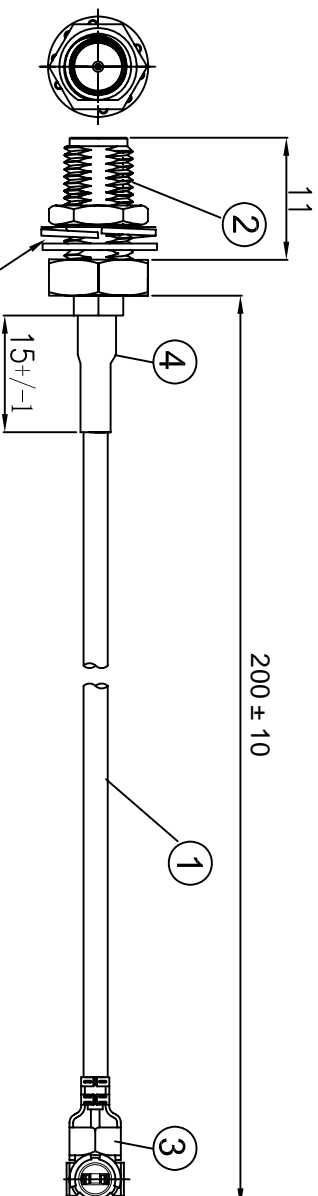

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
- 2.1. SEE TABLE
3. MECHANICAL:
 - 3.1. SMA PULL FORCE: 12.0KGS.
4. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
③	Terminal	High-quality Copy I-PEX 1.13 Terminal, gold-plating	1
②	Joint	SMA-K, split-type with 11 screws, gold-plating	1
①	Coaxial Cable	RF1, 13 Gray Cable, OD:1.13mm	AS

·SHENZHEN KINGHELM ELECTRONIC CO., LTD.


WWW.BDS666.COM

KHB200-38(11)-28

0755-83044319

ALL DIMENSION ARE IN MM		DRAWN	DATE	TITLE	
		Jamy	2018/05/04	RF CABLE	
COMPUTER GENERATED IN SOLIDWORKS		ENG.		I-PEX 1.13 TO SMA / F L=200 MM	
DO NOT SCALE THIS DRAWING		MFG.			
PROJECTION		Q.A.			
GENERAL TOLERANCE FOR ANGLES					
± 1° ± 0.3 ± 0.25 ± 0.150					

CUSTOMER PIN:



SCALE: Free

SIZE	Number	TYPE	SHEET	OF	REV
B			1	1	A