


Kinghelm®

REV. NUMBER		DESCRIPTION		DWN	CHK	DATE
A		DESIGN				

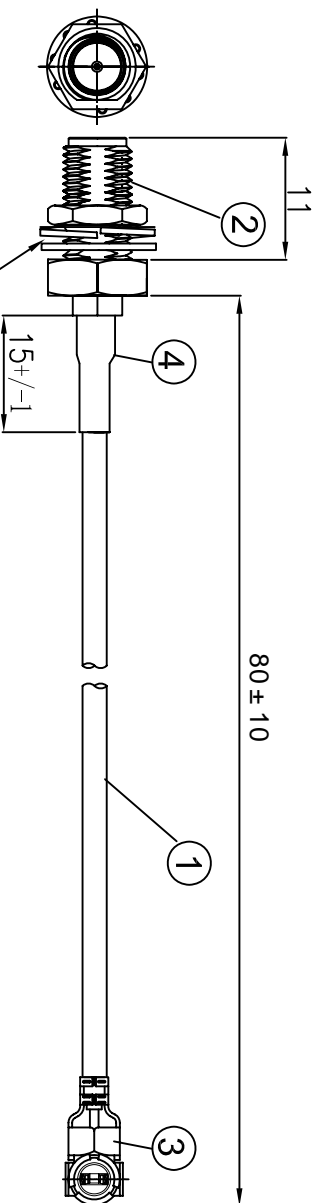

NOTES:
 Three components are delivered with accessories (2 washers and 1 nut)

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. MECHANICAL:
 - 3.1. SMA PULL FORCE: 12.0KGS.
4. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④		Black Heat-shrink Tube; OD:2.0MM	AS
③		High-quality Copy I-PEX 1.13 Terminal gold-plating	1
②		SMA-K split-type with 11 screws, gold-plating	1
①		RF1.13 Gray Cable, OD:1.13mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.

WWW.BDS666.COM

KHB80-37(11)-28

0755-83044319

ALL DIMENSION ARE IN MM		DRAWN	DATE	TITLE	
		Jamy	2018/05/04	RF CABLE	
COMPUTER GENERATED IN SOLIDWORKS		ENG.		I-PEX 1.13 TO SMA / F L=80 MM	
DO NOT SCALE THIS DRAWING		MFG.			
PROJECTION		Q.A.			
GENERAL TOLERANCE FOR ANGLES XX XXX XXXX ± 1° ± 0.3 ± 0.25 ± 0.150					

CUSTOMER PIN:

SIZE Number

REV

SCALE: Free TYPE SHEET 1 OF 1