


CUSTOMER :	Customer Part NO.
	Part Descripon

Item	Specification
NO. of conductors	N 6P-96P
Pitch	P 0.5±0.05
Total Pitch	PT 2.5-47.5±0.08
Total Length	L 25-20000±2
Insulation Length	IL 25-20000±2
Margin Width	M 0.5±0.08
Total Width	W 3.5-48.5±0.08
Strip Length	S1 1.5-5±0.5
Strip Length	S2 1.5-5±0.5
Reinforeing tape length	B1 2.5-30±2
Reinforeing tape length	B2 2.5-30±2
Slanting	A ≤0.3
Over lap	/
Terminal thickness	t1 0.3±0.02
Thickness insulation	t 0.12±0.02
Conductor thickness	Ct 0.035±0.01
Conductor width	Cw 0.3±0.03
Supporting Tapc Color	Blue
PET(Supporting Tapc Color):	0.225mm
PET(Insulation)	0.043mm
PET(Insulation)	0.043mm
Rev	A

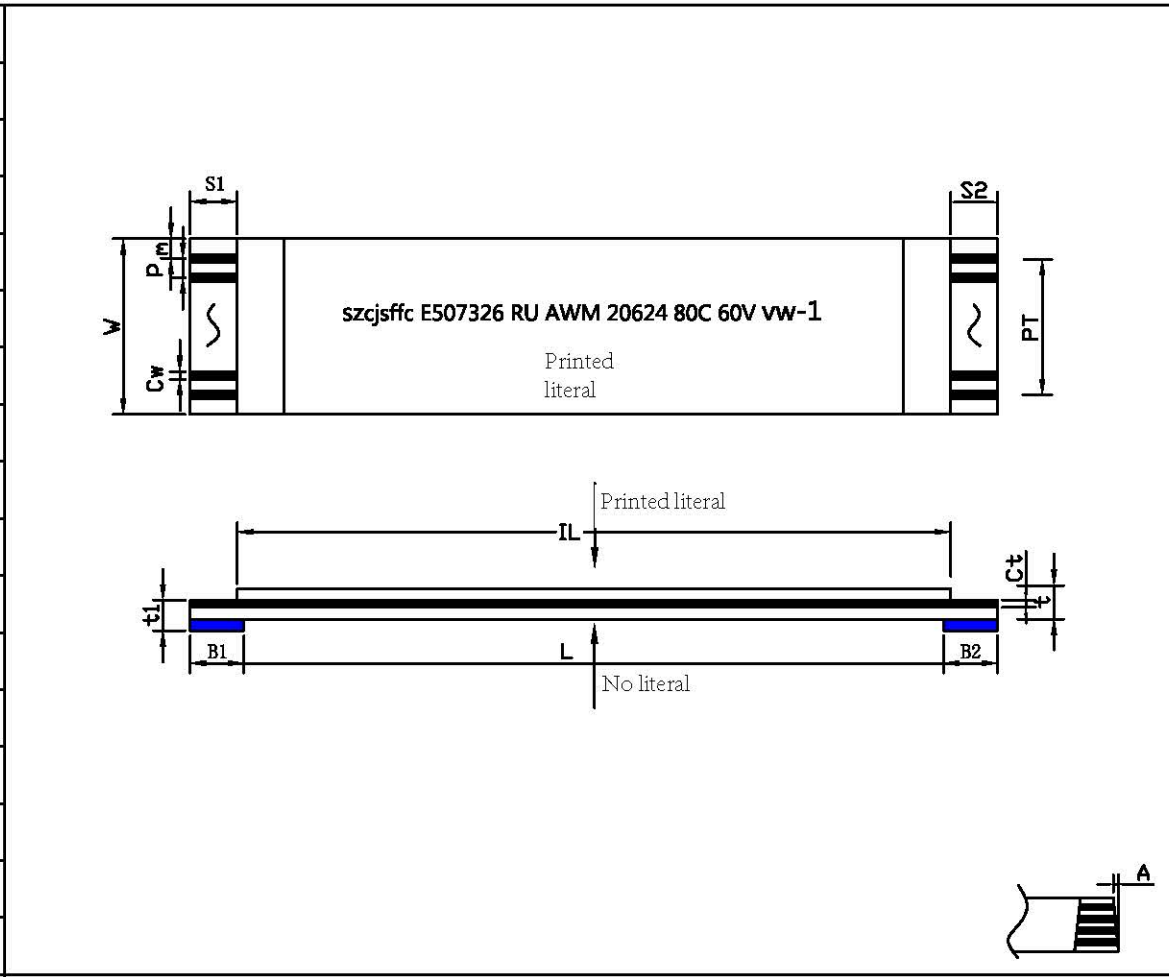

Storage condition :Recommended:			
Temp:15° C~25° C		Humidity:30~60RH%	
Drawing Not TO Scale Hidden Lines Not Shown	Discharge Date	Review Date	Drawing NO
	2021-05-19		
 Unit(单位):mm	SHENZHEN KINGHELM ELECTRONIC CO., LTD		WWW. BDS666. COM
	KH-FFC-A0.5-16P-200MM		0755-83044319