


| | | |
|----------------------------|---------------|-------------------|
| CUSTOMER : | | Customer Part NO. |
| | | Part Descripon |
| Item | Specification | |
| NO. of conductors | N | 6P-96P |
| Pitch | P | 1.0 ± 0.08 |
| Total Pitch | PT | 3-95 ± 0.1 |
| Total Length | L | 25-20000 ± 2 |
| Insulation Length | IL | 25-20000 ± 2 |
| Margin Width | M | 1.0 ± 0.1 |
| Total Width | W | 5-97 ± 0.1 |
| Strip Length | S1 | 1.5-5 ± 0.5 |
| Strip Length | S2 | 1.5-5 ± 0.5 |
| Reinforeing tape length | B1 | 2.5-30 ± 2 |
| Reinforeing tape length | B2 | 2.5-30 ± 2 |
| Slanting | A | ≤ 0.3 |
| Over lap | / | |
| Terminal thickness | t1 | 0.3 ± 0.02 |
| Thickness insulation | t | 0.12 ± 0.02 |
| Conductor thickness | Ct | 0.035 ± 0.01 |
| Conductor width | Cw | 0.65 ± 0.03 |
| Supporting Tapc Color | Blue | |
| PET(Supporting Tapc Color) | 0.225mm | |
| PET(Insulation) | 0.043mm | |
| PET(Insulation) | 0.043mm | |
| Rev | A | |

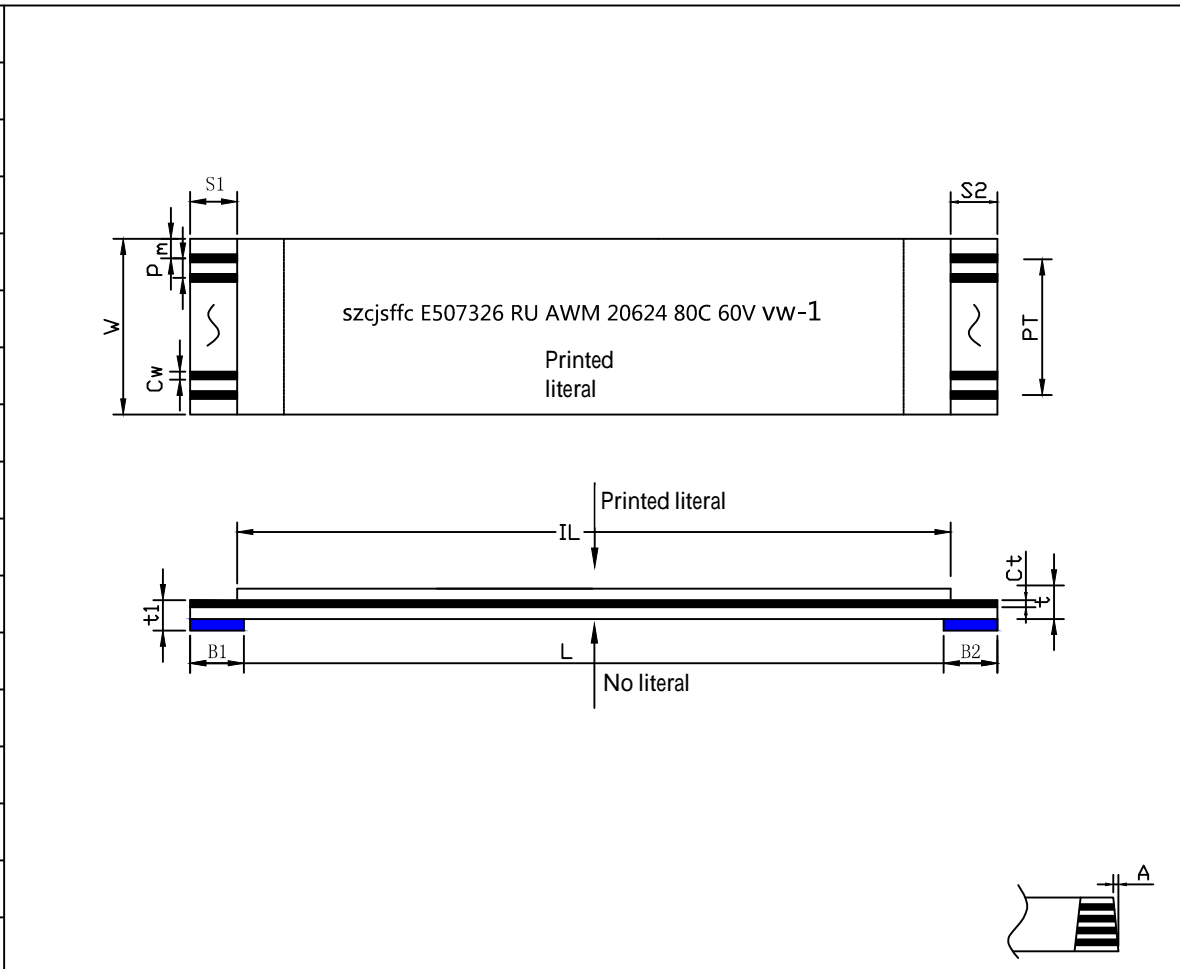

| | | | |
|--|---------------------------------------|-------------------|------------------|
| Storage condition :Recommended: | | | |
| Temp:15° C~25° C | | Humidity:30~60RH% | |
| Drawing Not TO Scale Hidden Lines Not Shown | Discharge Date | Review Date | Drawing NO |
| | 2021-05-19 | | |
| Unit(单位):mm | SHENZHEN KINGHELM ELECTRONIC CO., LTD | | WWW. BDS666. COM |
| | KH-FFC-A1. 0-6P-200MM | | 0755-83044319 |