
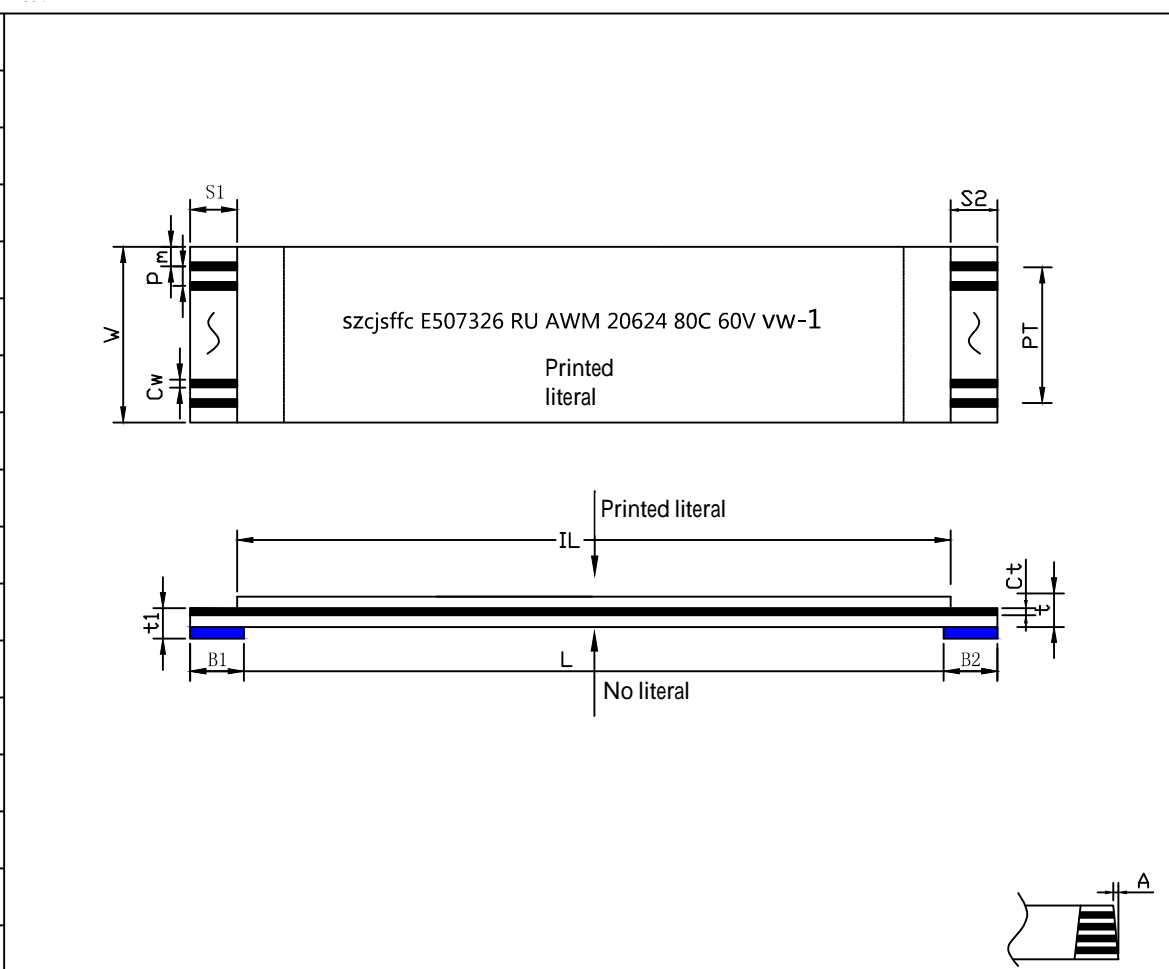


CUSTOMER :		Customer Part NO.
		Part Descripon
Item	Specification	
NO. of conductors	N	6P-96P
Pitch	P	1.0 ± 0.08
Total Pitch	PT	3-95 ± 0.1
Total Length	L	25-20000 ± 2
Insulation Length	IL	25-20000 ± 2
Margin Width	M	1.0 ± 0.1
Total Width	W	5-97 ± 0.1
Strip Length	S1	1.5-5 ± 0.5
Strip Length	S2	1.5-5 ± 0.5
Reinforeing tape length	B1	2.5-30 ± 2
Reinforeing tape length	B2	2.5-30 ± 2
Slanting	A	≤ 0.3
Over lap	/	
Terminal thickness	t1	0.3 ± 0.02
Thickness insulation	t	0.12 ± 0.02
Conductor thickness	Ct	0.035 ± 0.01
Conductor width	Cw	0.65 ± 0.03
Supporting Tapc Color	Blue	
PET(Supporting Tapc Color)	0.225mm	
PET(Insulation)	0.043mm Printing	
PET(Insulation)	0.043mm White	
Rev	A	



Storage condition :Recommended:			
Temp:15° C~25° C		Humidity:30~60RH%	
Drawing Not TO Scale Hidden Lines Not Shown	Discharge Date	Review Date	Drawing NO
	2021-05-19		
 Unit:mm	SHENZHEN KINGHELM ELECTRONIC CO., LTD		WWW. BDS666. COM
	KH-FFC-A1. 0-8P-200MM		0755-83044319