
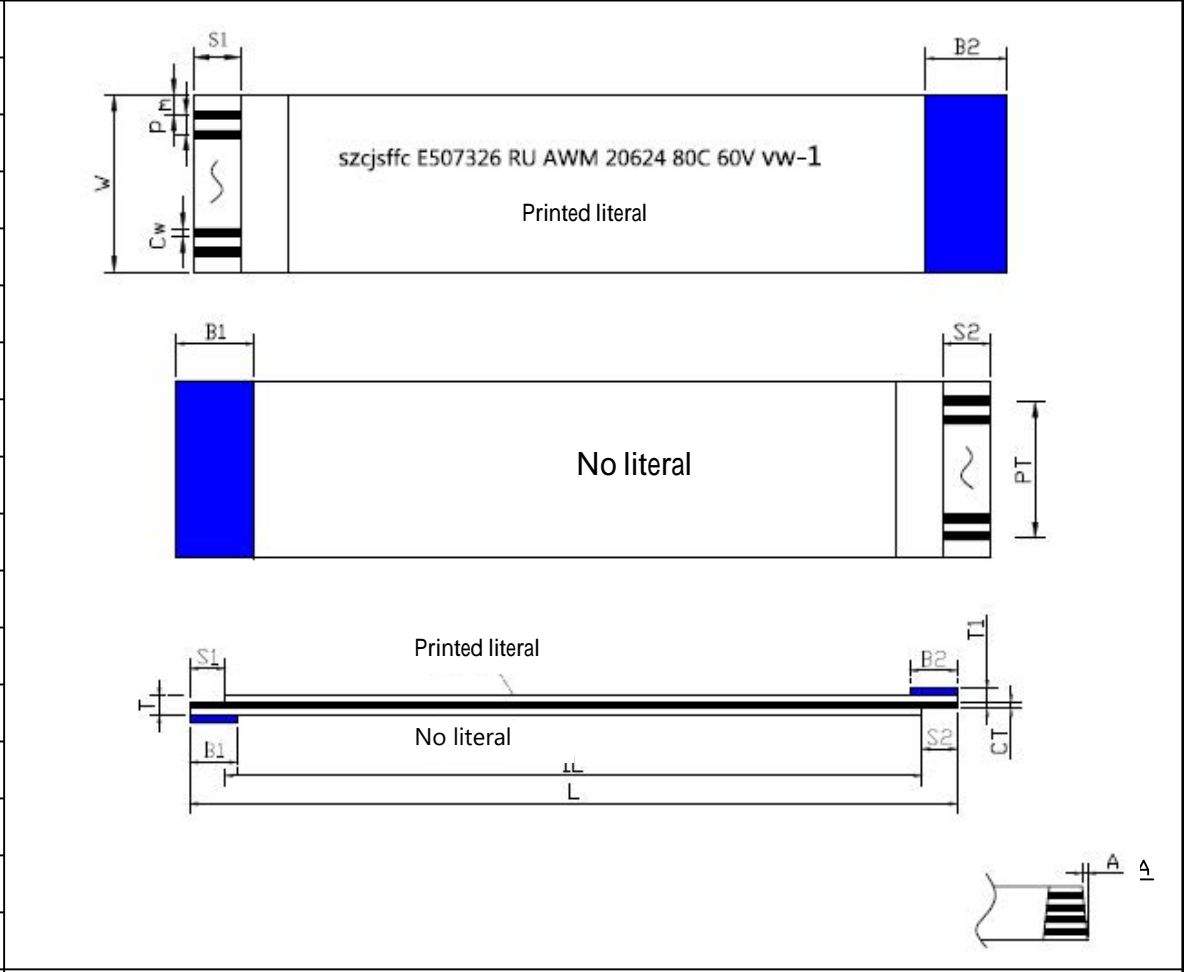


CUSTOMER :	Customer Part NO.
	Part Descripon

Item	Specification
NO. of conductors	N 6P-96P
Pitch	P 0.5 ± 0.05
Total Pitch	PT 2.5-47.5 ± 0.08
Total Length	L 25-20000 ± 2
Insulation Length	IL 25-20000 ± 2
Margin Width	M 0.5 ± 0.08
Total Width	W 3.5-48.5 ± 0.08
Strip Length	S1 1.5-5 ± 0.5
Strip Length	S2 1.5-5 ± 0.5
Reinforeing tape length	B1 2.5-30 ± 2
Reinforeing tape length	B2 2.5-30 ± 2
Slanting	A ≤ 0.3
Over lap	/
Terminal thickness	t1 0.3 ± 0.02
Thickness insulation	t 0.12 ± 0.02
Conductor thickness	Ct 0.035 ± 0.01
Conductor width	Cw 0.3 ± 0.03
Supporting Tape Color	Blue
PET(Supporting Tape Color)	0.225mm
PET(Insulation)	0.043mm Printing
PET(Insulation)	0.043mm White
Rev	B



Storage condition :Recommended:			
Temp:15° C~25° C		Humidity:30~60RH%	
Drawing Not TO Scale Hidden Lines Not Shown	Discharge Date	Review Date	Drawing NO
	2021-05-19		
 Unit:mm	SHENZHEN KINGHELM ELECTRONIC CO., LTD.		WWW. BDS666. COM
	KH-FFC-V0.5-16P-100MM		0755-83044319