


|                            |    |                   |
|----------------------------|----|-------------------|
| CUSTOMER :                 |    | Customer Part NO. |
|                            |    | Part Descripon    |
| Item                       |    | Specification     |
| NO. of conductors          | N  | 4P-96P            |
| Pitch                      | P  | 1.0 ± 0.08        |
| Total Pitch                | PT | 3-95 ± 0.1        |
| Total Length               | L  | 25-20000 ± 2      |
| Insulation Length          | IL | 25-20000 ± 2      |
| Margin Width               | M  | 1.0 ± 0.1         |
| Total Width                | W  | 5-97 ± 0.1        |
| Strip Length               | S1 | 1.5-5 ± 0.5       |
| Strip Length               | S2 | 1.5-5 ± 0.5       |
| Reinforeing tape length    | B1 | 2.5-30 ± 2        |
| Reinforeing tape length    | B2 | 2.5-30 ± 2        |
| Slanting                   | A  | ≤ 0.3             |
| Over lap                   |    | /                 |
| Terminal thickness         | t1 | 0.3 ± 0.02        |
| Thickness insulation       | t  | 0.12 ± 0.02       |
| Conductor thickness        | Ct | 0.035 ± 0.01      |
| Conductor width            | Cw | 0.65 ± 0.03       |
| Supporting Tape Color      |    | Blue              |
| PET(Supporting Tape Color) |    | 0.225mm           |
| PET(Insulation)            |    | 0.043mm Printing  |
| PET(Insulation)            |    | 0.043mm White     |
| Rev                        |    | B                 |

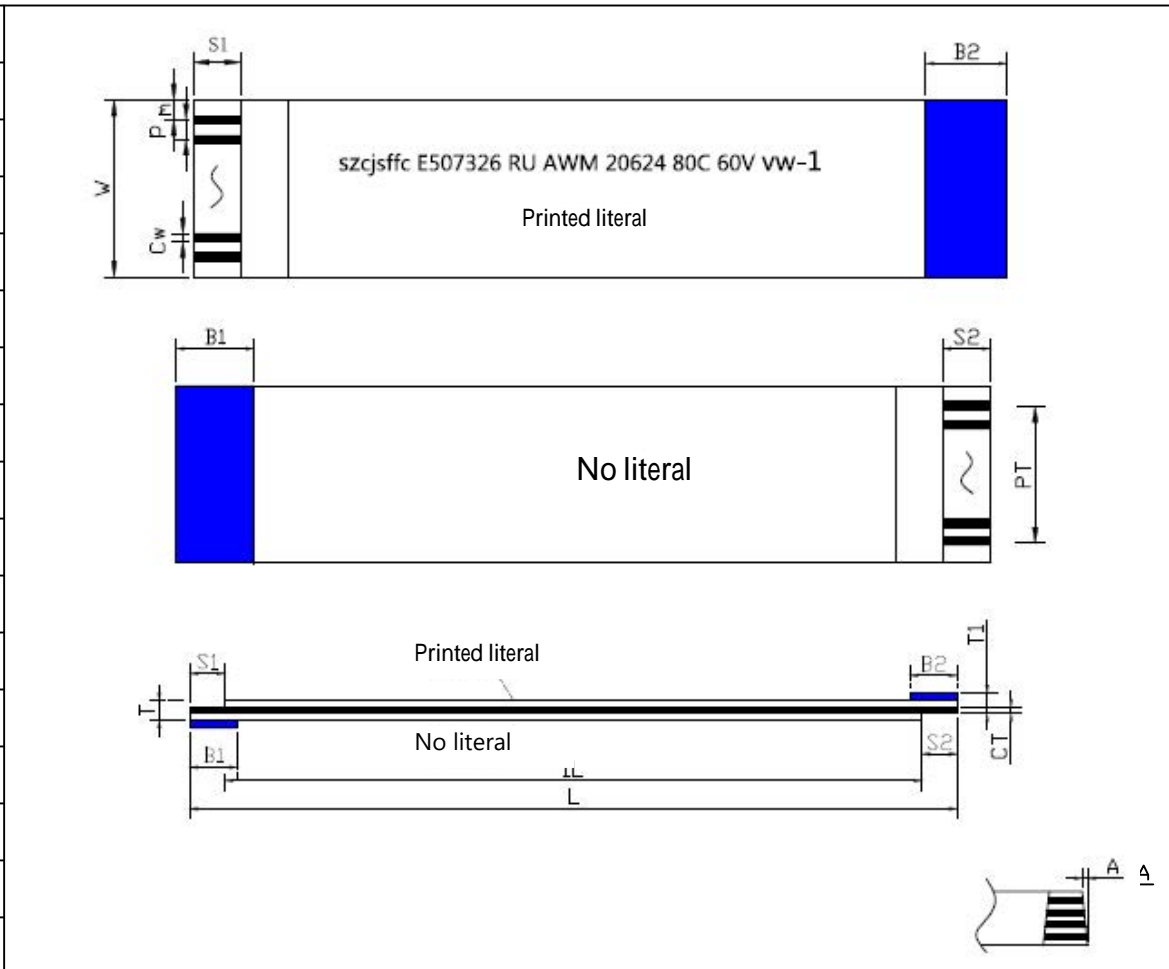

|  |  |                   |                  |
|--|--|-------------------|------------------|
| Storage condition :Recommended:                |  |                   |                  |
| Temp:15° C~25° C                               |  | Humidity:30~60RH% |                  |
| Drawing Not TO Scale<br>Hidden Lines Not Shown | Discharge Date                         | Review Date       | Drawing NO       |
|  | 2021-05-19                             |                   |                  |
| <br>Unit:mm                                    | SHENZHEN KINGHELM ELECTRONIC CO., LTD. |                   | WWW. BDS666. COM |
|  | KH-FFC-V1.0-22P-100MM                  |                   | 0755-83044319    |