

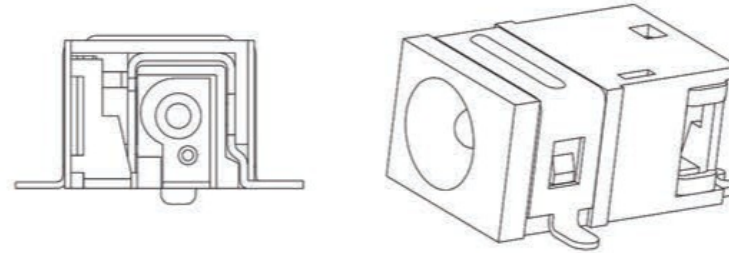
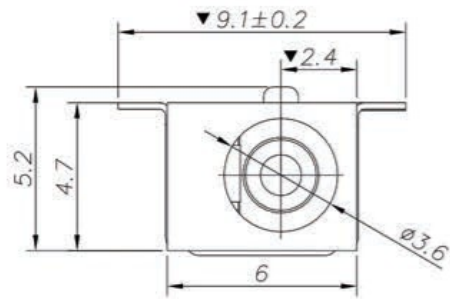


Correction (Marking)	Description	Date

Main Technical Properties		Tolerance
Rated Electrical Load	DC30V\0.5A	X. ±0.20
Contact Resistance	≤0.03Ω	.X±0.10
Insulation Resistance	≥100MQ	.XX±0.05
Withstand Voltage	AC500V (50Hz) /min	.XXX±0.02
Insertion-withdrawal Force	3-20N	X.° ±5°
Range of Operating Temperature	-30-70°C	.X° ±2°
Service Life	5000times	.XX° ±1°

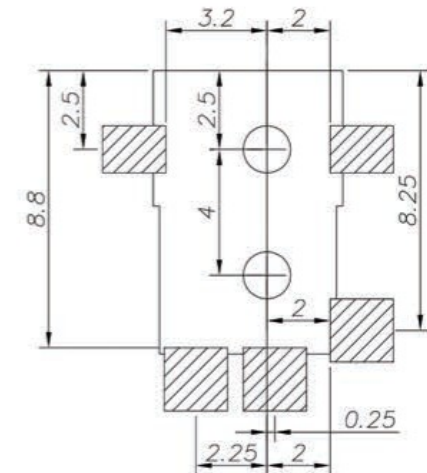

P. C. B LAYOUT TOP VIEW

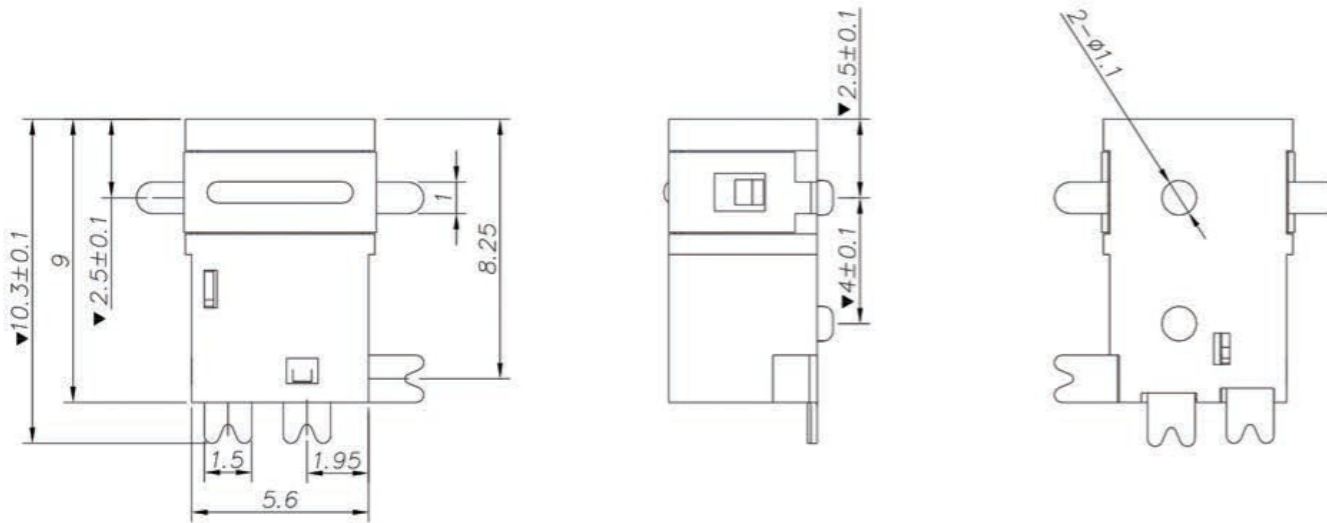

PIN	Ø 1.0	Ø 1.3
APPO		

BOM						Schematic				Visual Angle				Designed				Department Countersignature				Product name DC Electrical Socket	
7	DC-045B	Flexible Piece	1	Phosphor Bronze	T=0.25	Silver-plating			scale 4: 1	Approved	Edition A 2	Date 2017.09.20	Assembly Department Injection Department	Stamping Department Marketing Department	6 sheets in total Page 4	Model:: DC-045B		Sheet Numbers: ZJF/SZL-DC-045B-01107-2017					
6	DC-045B	Inserting Piece	1	1162 Brass Strip	T=0.25	Silver-plating																	
5	DC-045B	Flat Piece	1	H62 Brass Strip	T=0.25	Silver-plating																	
4	DC-015B	Center Pin	1	H62 Brass Rod		Cu-Sn																	
3	DC-045B	Cover Base	1	1162 Brass Strip	T=0.25	Cu-Sn																	
2	DC-045B	Base	1	PPA	Black																		
1	DC-045B	Product name	Quantity	Materials	Specification	Electroplating										SHENZHEN KINGHELM ELECTRONIC CO., LTD. K11-DC-045B-1.3STM				WWW.BDS666.COM 0755-83044319			