


∅0.90 Sucker position

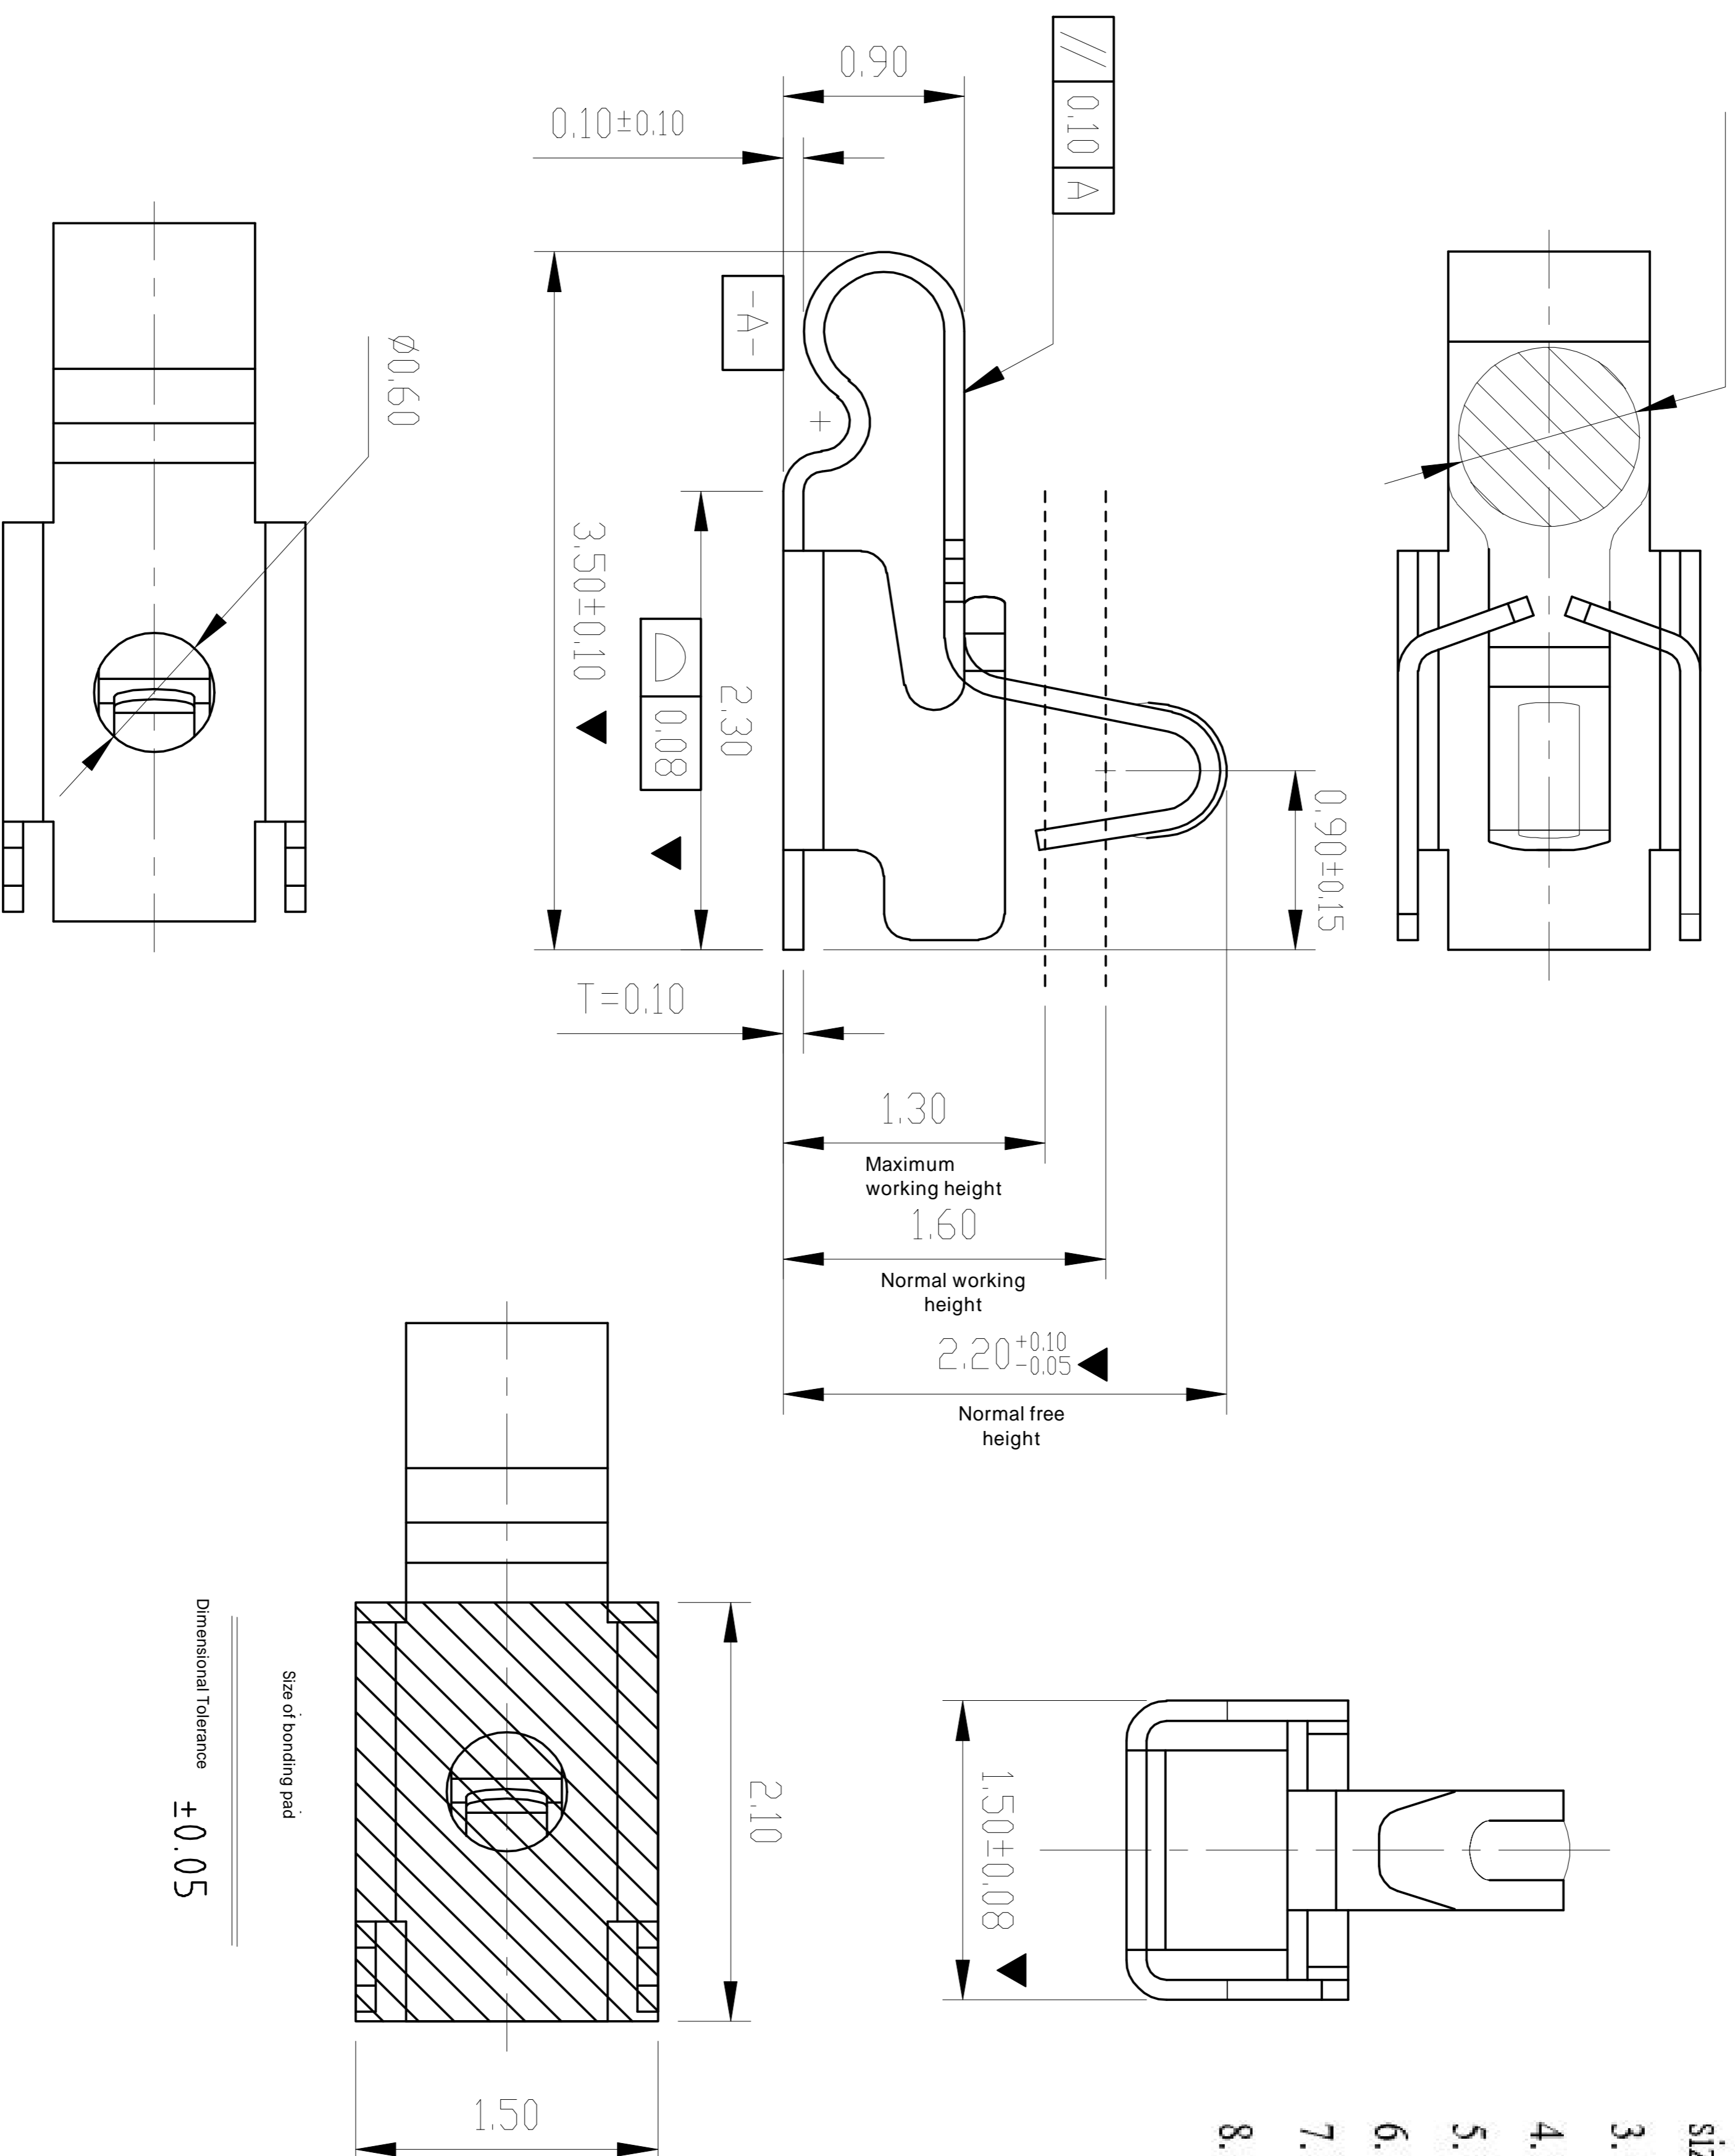


Dimensional Tolerance ±0.05

Size of bonding pad

Rev.	ECN Number	Description	Date	Drawn	Checked	Approved

## Specification

1. Material: stainless steel SUS304, T = 0.10 ± 0.005;
- ▼ 2. The welding and contact surfaces of the Tin terminal shall be free of burrs, and the maximum size of burrs in other parts shall be 0.03mm;
3. Twisting: 45° / 1000mm, arch 5mm/1000mm;
4. Dimensions marked with "▼" shall be measured and inspected with emphasis;
5. Unmarked R Max R0.13;
6. Electroplating must be inspected by 48-hour salt spray test;
7. Life test > 20000 times The elasticity of the product shall be between 60gf and 80gf as required.
8. Ni 50-80u"min, soldering area gold-plating, contact area gold plating1U"MIN

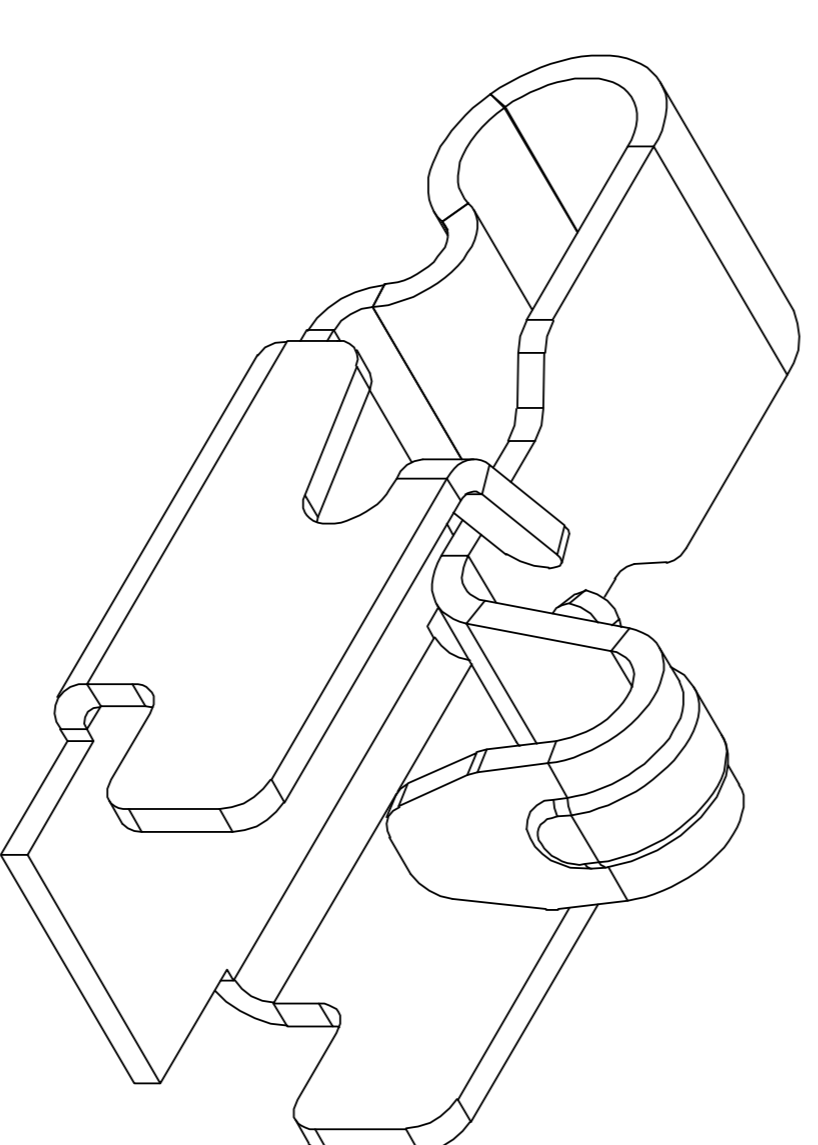

SHENZHEN KINGHELM ELECTRONIC CO., LTD.		SCALE: 1:1		DRAWN		DATE	
WWW.BDS666.COM		UNIT: mm		CHECK		DATE	
Model : KH-351522-TP		SIZE: A4		APPROVE		DATE	
0755-83044319							
GENERAL TOLERANCE		DWG. NO. 681-0022B-1		TITLE Customer's drawing		REV. A	
XX. ±0.50		PARTS NO.(INTENDED USE) JXH0022B1		RF Antenna Spring, SMT, L3.5*W1.5*H2.2mm		SHEET 1/1	
X. ±0.35							
.X ±0.25							
.XX ±0.15							
X.° ±2.0°							
.X° ±1.0°							
.XX° ±0.5°							