
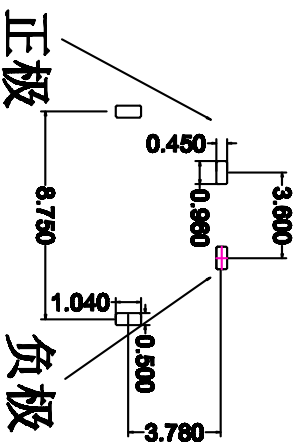
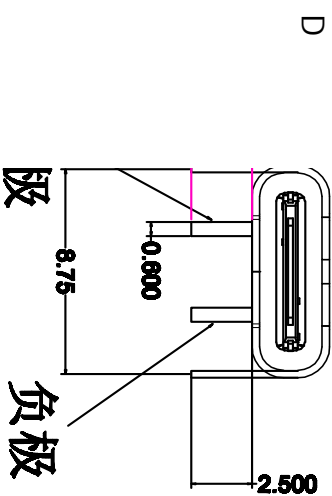



TYPE-C 2P 90度插 板母座

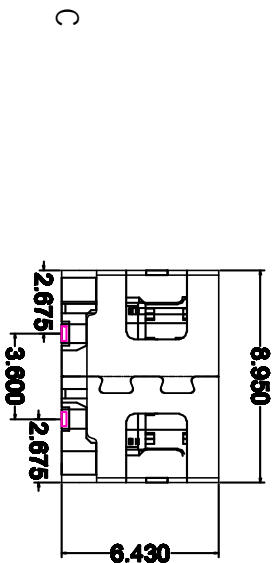

- NOTES:
- MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY,
GOLD PLATED Min ON CONTACT AREA: 100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-HIT=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
 - MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 5000 CYCLES
 - ELECTRICAL:
CURRENT: 3A FOR VBUS,
1.25A FOR GND PIN,
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C
 - 尺寸标注事项:
图示有标示"∅"者为孔径全数, 重点标注尺寸.
6. 产品符合RoHS标准.

Table:

成品料号	零件名称	零件料号	材料 / 电镀
TX	端子	TX	镀层 30μm Ni NO PLATING
	焊接端子/插孔	TX	镀层 30μm Ni Sn 80~200u"
	外壳	TX	镀层 30μm Ni 电镀材料: 镍层.

深圳市金航标电子有限公司 www.bds666.com

KH-TYPE-C-2P 0755-83044319

DIMENSIONAL DATA:		TITLE:	
.X: ±0.35	.X': ±1.5'	TYPE-C 2P 90度母座 加长脚2.5	
.XX: ±0.25	.XX': ±1.0'	PART NO.: SEE TABLE	
.XXX: ±0.20	.XXX': ±0.5'	DWG. NO.: T16-000X	
DATE:	SEE NOTES	SCALE: 1:1	
DESIGNER:	Len.Song	PAGE: 1/1	
		UNIT: mm	
		REV: A0	

2 3 4 5 6 7 8