
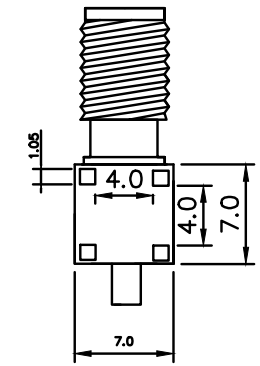


### MAIN TECHNICAL SPECIFICATIONS

|                     |      |                |
|---------------------|------|----------------|
| model               | Type |                |
| FREQUENCY RANGE     |      | 0-3G           |
| INPUT IMPEDANCE     |      | 50 OHM         |
| VSWR                |      | 1:1.2          |
| GAIN                |      | ----           |
| POLARIZATION FORM   |      | ----           |
| RADIATION           |      | ----           |
| MAXIMUM POWER       |      | ----           |
| CABLE               |      | RF1.13- 80MM   |
| MAX DIAMETER        |      | 13.6mm         |
| MIN DIAMETER        |      | 1.13mm         |
| CONNECTOR TYPE      |      | IPEX -- SMAKWE |
| LIGHTING PROTECTION |      | DC GROUNDING   |

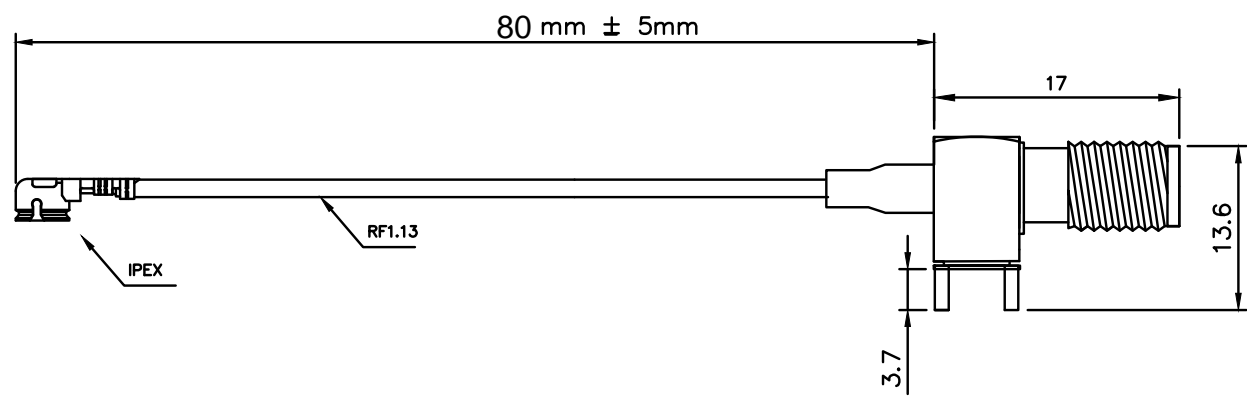

|                                       |                |
|---------------------------------------|----------------|
| SHENZHEN KINGHELM ELECTRONIC CO.,LTD. | WWW.BDS666.COM |
| KH-IPEX-SMAKWE-B80H                   | 0755-83044319  |

Technical detailed inquiry

|                                    |              |   |                |                       |                                   |                                      |
|------------------------------------|--------------|---|----------------|-----------------------|-----------------------------------|--------------------------------------|
| DWN BY/DATE<br>JIANG<br>2015-03-25 | DESG BY/DATE | TOLERANCES<br>.X±<br>.XX±<br>.XXX±<br>ANGLES± | SCALE<br>1 : 1 | UNIT<br>m / m         | ENG PROJECT NO.<br>KH 150325-0025 | Model<br>YL-IPEX-SMAKWE-RR1.13- 80MM |
| CHK BY/DATE                        | APPD BY/DATE |   | SH 1 OF 1      | REFER TO: RADIOMETRIX | CONTROL NO.                       | DWG NO.<br>P/N:                      |
|                                    |              |   |                |                       |                                   | RFV                                  |