


REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

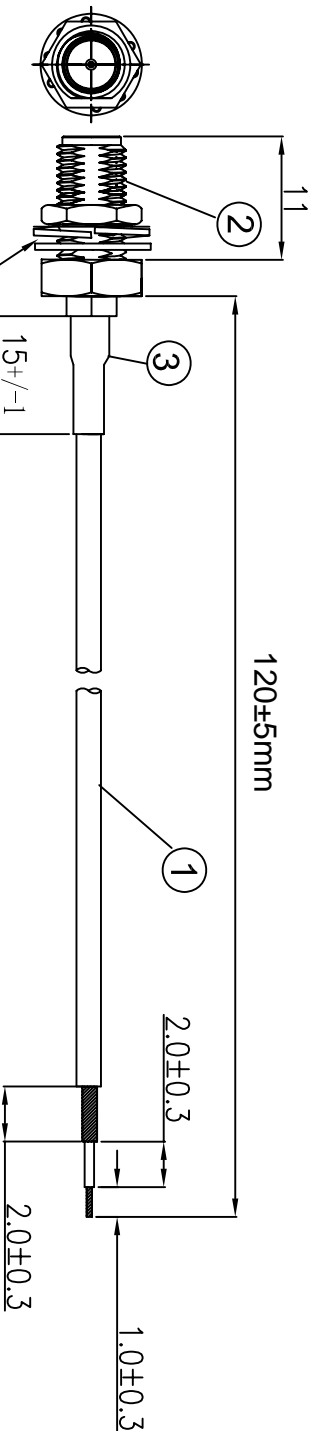

Three components are delivered with accessories
(Gasket, washer and nut)

NOTES:

- 1. ELECTRICAL:**
- 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES
- 2. MATERIAL:**
- 2.1. SEE TABLE
- 3. ALL COMPONENTS ARE ROHS COMPLIANT.**

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
③	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
②	Joint	RP-SMA-K, Split-type, 11 Screws, Gold-plating	1
①	Coaxial Cable	RF 1.13 Black Cable, OD:1.13mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.

WWW.BDS666.COM

Model : KH-122-SMA-120

0755-83044319

ALL DIMENSION ARE IN MM		DRAWN	DATE	SMA /F TO OPEN L=120mm	
		Jamy	2020-06-15		
COMPUTER GENERATED IN SOLIDWORKS		ENG.			
MFG.					
Q.A.					
DO NOT SCALE THIS DRAWING		GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX			
PROJECTION		± 1° ± 0.3 ± 0.25 ± 0.150			

CUSTOMER P/N:

SIZE	Number	REV
B		A

SCALE: Free TYPE SHEET 1 OF 1