



CH1 A/R SWR MKR 3: 1.0922 U
 REF 1.000 U 1.000U/ 1 350 000 000.HZ

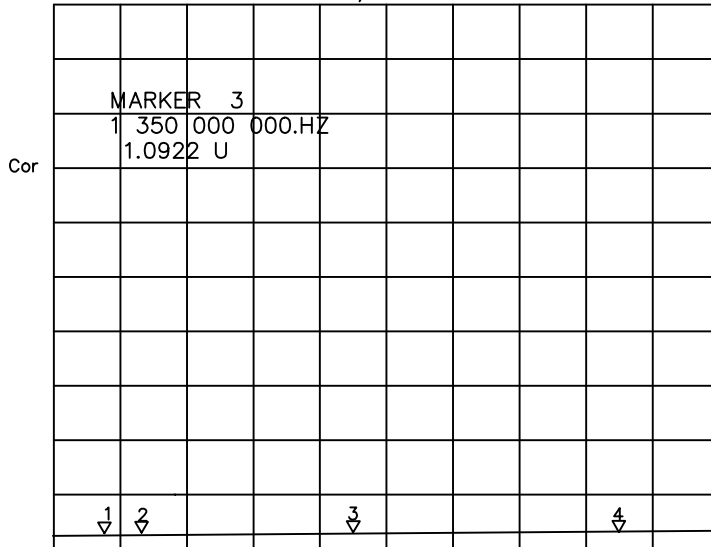

CH1 START 000 000 000.HZ STOP 3 000 000 000.HZ

MAIN TECHNICAL SPECIFICATIONS

model	Type
FREQUENCY RANGE	0-3G
INPUT IMPEDANCE	50 OHM
VSWR	1:1.2
GAIN	----
POLARIZATION FORM	----
RADIATION	----
MAXIMUM POWER	----
CABLE	RF1.13-120MM
MAX DIAMETER	13.6mm
MIN DIAMETER	1.13mm
CONNECTOR TYPE	IPEX -- SMAKWE
LIGHTING PROTECTION	DC GROUNDING

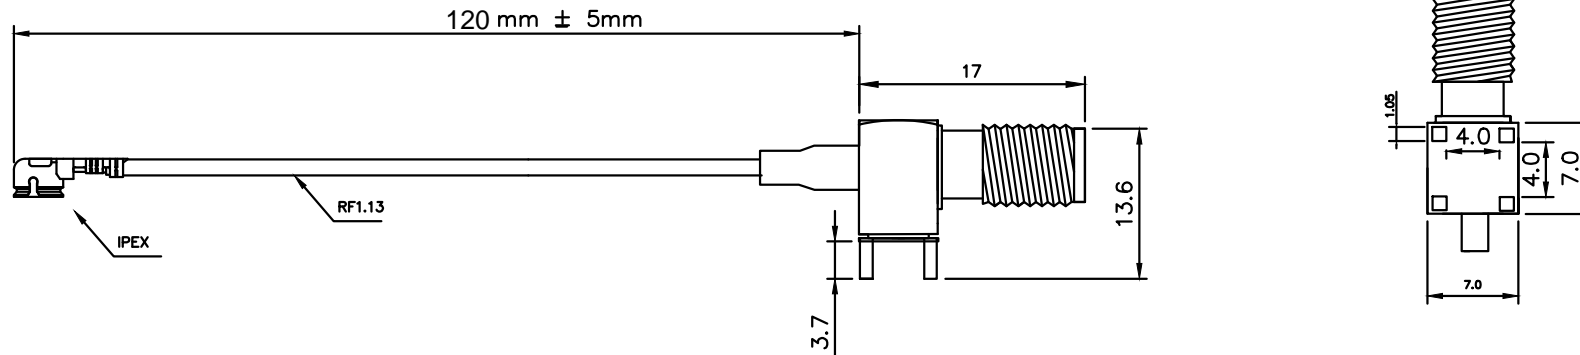

SHENZHEN KINGHELM ELECTRONIC CO., LTD.	WWW.BDS666.COM
Model: KH-IPEX-SMAKWE-B120H	0755-83044319

DWN BY/DATE	DESG BY/DATE	TOLERANCE	SCALE		ENG PROJECT NO.	TITLE
CHK BY/DATE	APPD BY/DATE	.X± .XX± .XXX± ANGLES±	1 : 1		150325-0025	IPEX-SMAKWE-RR1.13-120 MM
			UNIT	SH 1 OF 1	CONTROL NO.	DWG NO.
			m / m			REV