Kinghelm®







| Size range | Unspecified Tolerance |
|---|---|
| 0~3 | ±0.1 |
| 3~6 | ±0.15 |
| 6~9 | ±0.2 |
| 9~12 | ±0.25 |
| 12~15 | ±0.3 |



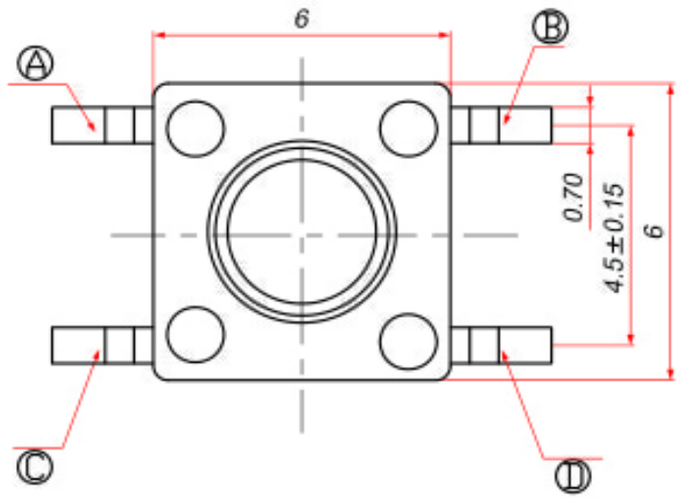


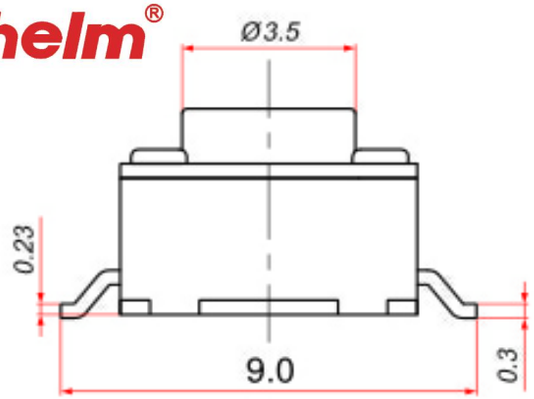


1.Rating:DC12V 50mA.
2.Travel:0.3±0.1mm.
3.Operating Force:250/180±30gf
4.Contact Resistance:50mΩMax.
5.Life:80,000 Cycles Min.

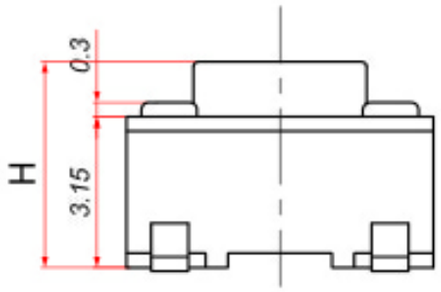


Recommended P.C.B layout

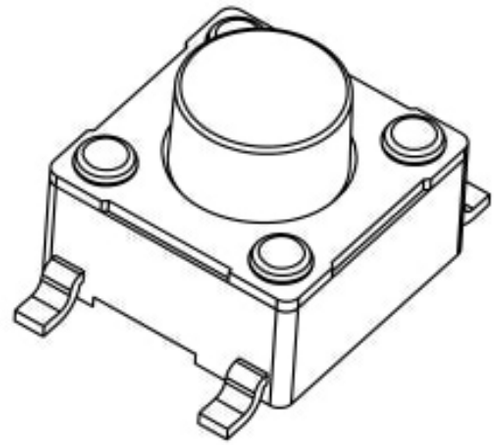


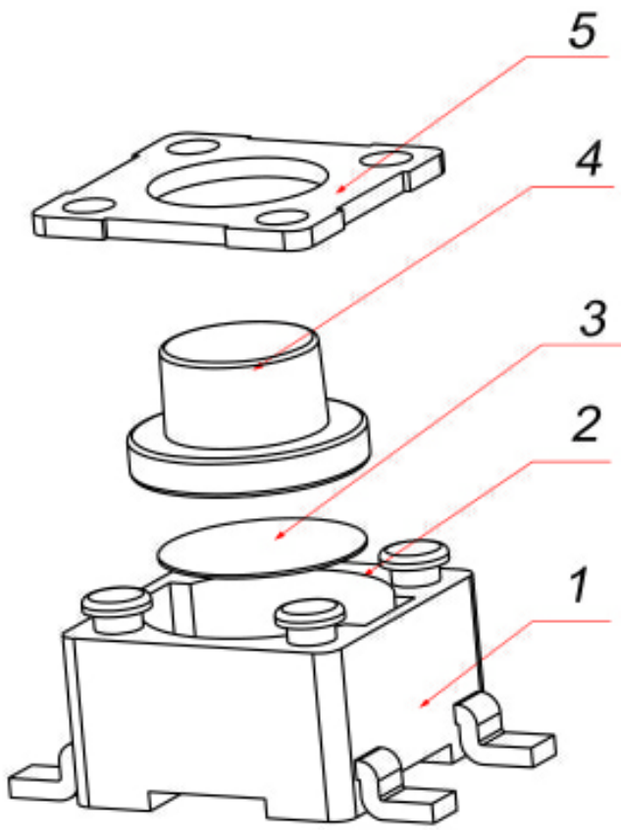SCHEMATIC

| NO. | DESCRIPTION | MATERIAL | COLOR | REMARK |
|---|---|---|---|---|
| 5 | Cover plate | Iron | —— | Cu-electroplated Tin |
| 4 | Button | PPA | Black/White | |
| 3 | Flexible Piece | Silver coating | —— | Imported |
| 2 | Base | PPA | Black | |
| 1 | Inserts | Brass | —— | Silver-plating |
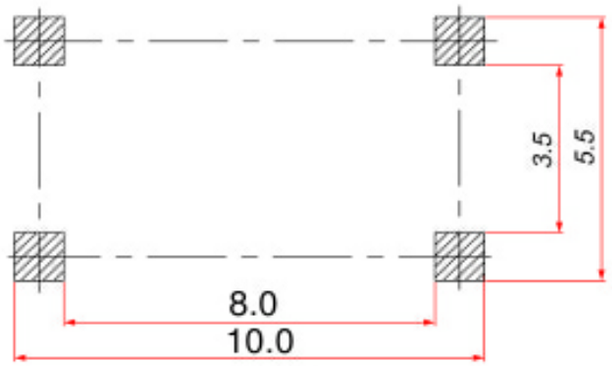
| | |
|---|---|
| SHENZHEN KINGHELM ELECTRONIC CO., LTD. | WWW.BDS666.COM |
| KH-6X6X13H-STM | 0755-83044319 |

CUSTOMER COPY | TITLE: 6*6 SMD TACT SWITCH

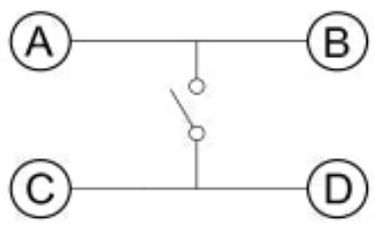TYPE NO. RS6647WA-LF

PART NO.(OLD)

DRAWING NO. A Status Code

SCALE 5:1 | UNIT mm | A4

| ECN(DCN) NO. | REV | DATE | DESCRIPTION | CHANGE | APPRO. | GENERAL TOLERANCE UNLESS OTHERWISE NOTED |
|---|---|---|---|---|---|---|
| | PA | 07/12/29 | | | | |

| | | | |
|---|---|---|---|
| DRAW | | | |
| DESIGN | | | |
| CHECH | | | |
| APPRO. | | | |