


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

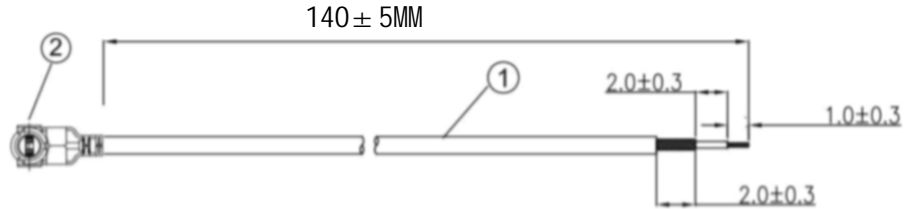

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING-DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
②	接头	四代IPEX端子	1
①	同轴线	RG0.81 蓝色线, OD:0.81MM	AS

深圳市金航标电子有限公司

www.kinghelm.com.cn

KH-IPEX4-221-RG0.81-BU140

0755-28190160

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2020-06-15	四代IPEX TO OPEN RG0.81蓝色转接线												
COMPUTER GENERATED IN SOLIDWORKS	ENG.														
DO NOT SCALE THIS DRAWING	MFG.														
PROJECTION	GENERAL TOLERANCE FOR ANGLES	<table border="1"> <tr> <td>X.X</td> <td>X.XX</td> <td>X.XXX</td> </tr> <tr> <td>± 1°</td> <td>± 0.3</td> <td>± 0.25 ± 0.150</td> </tr> </table>	X.X	X.XX	X.XXX	± 1°	± 0.3	± 0.25 ± 0.150	<table border="1"> <tr> <td>SIZE</td> <td>Number</td> <td>REV</td> </tr> <tr> <td>B</td> <td></td> <td>A</td> </tr> </table>	SIZE	Number	REV	B		A
X.X	X.XX	X.XXX													
± 1°	± 0.3	± 0.25 ± 0.150													
SIZE	Number	REV													
B		A													
CUSTOMER PIN:	SCALE: Free	TYPE	SHEET 1 OF 1												

