
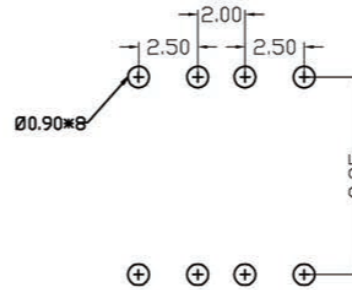
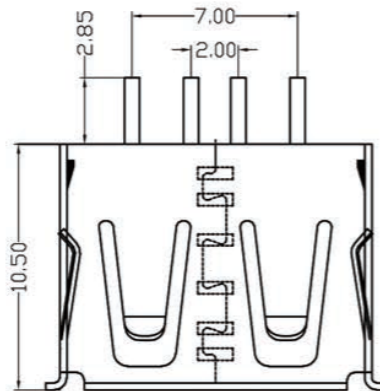
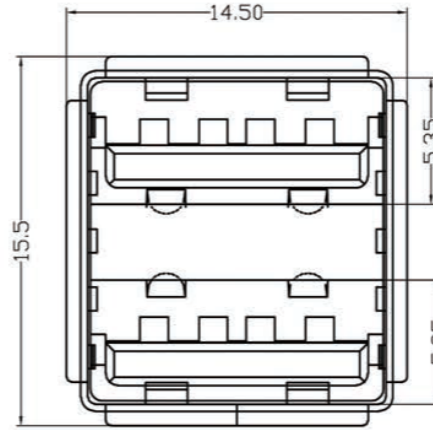
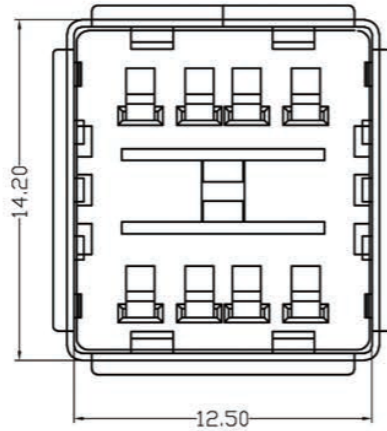


Kinghelm®

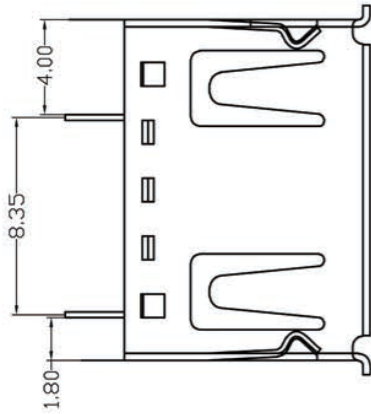

RECOMMENDED P.C.B PATTERN LAY OUT

Description

Electrical Specification:

1. Contact Resistance: 30 m (max)
2. Surface Insulation Resistance: 1000 M (min)
3. High Voltage Resistance: 500V AC for one minute

Material:

1. Rubber Core: PBT
2. Terminal: Brass C2680
3. Shell: Brass C2680/SPCC

Electroplating:

1. Terminals: Contact areas plated with gold 1u", Solder area bright tin plated 100-200u"
2. Shell: Full area nickel plating 50-80u"

TOLERANCE UNLESS OTHERWISE SPECIFIED
.XXX ±0.10
.XX ±0.20
.X ±0.30
.X' ±3'

Part Name: USB AF Double Layer 10.5

Shenzhen Kinghelm Electronics Co., Ltd

www.kinghelm.net

KH-2AF180-10.5JB

0755-83044319

REV	DESCRIPTION	REV BY	APPROVED	DATE	MATL:	SEE SPECIFICATION	APPROVED
A					PROJECTION:	THIRD ANGLE PROJECTION	CHECKED
					UNIT	SCALE	REV(NO)
					mm	1:1	A
						SHEET	1 OF 1
						DATE	2010.07.16

APPROVED	
CHECKED	
DRAWN	HEXING
DATE	2010.07.16