


# Kinghelm®

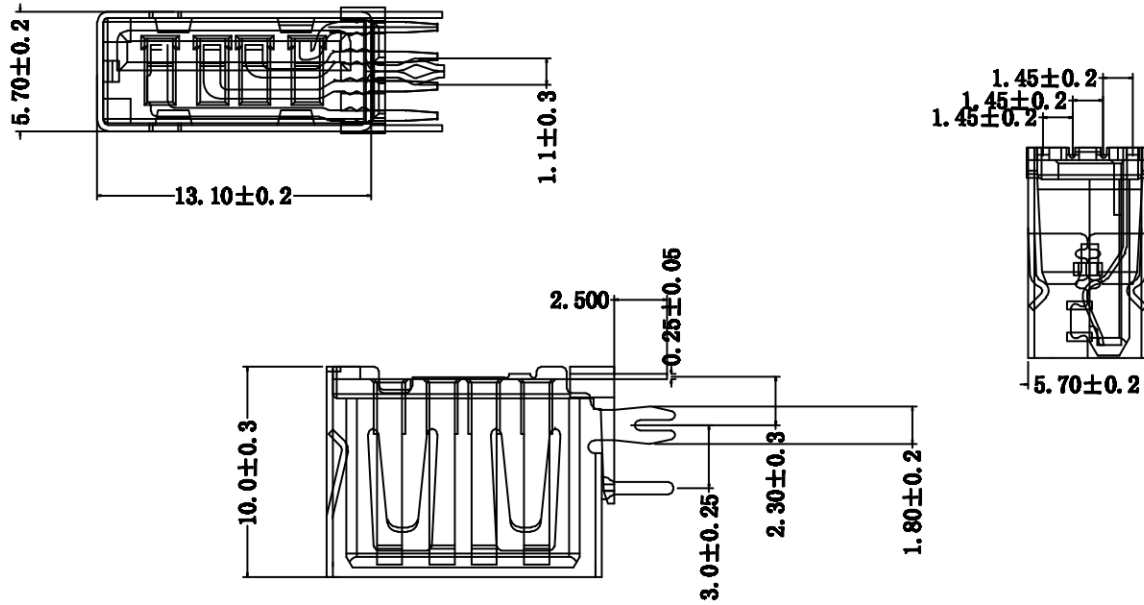

## NOTES

1. Material: C2880R-H,T=0.30±0.01mm; (C5191R-H can also be produced)
2. Nickelplate: 100U" min
3. The plating surface of the shell shall not have oxidation, yellowing, blackening, dirt and other defects.
4. Tinning performance should reach more than 95%, adhesion test, shell bending back and forth 90 degrees plating surface shall not have peeling phenomenon
5. The maximum allowed Burr is 0.03 mm
6. Appearance does not allow crushing, dirt, mold marks and other adverse phenomena
7. Salt spray test more than 24 hours, up to 9.8 grade
8. The whole set of finished products should be coordinated smoothly
9. △ is the quality control must control the ruler
10. ♡ is \*CPK Dlmeneion >1.33
11. ⊕ is the inspection size

Shenzhen Kinghelm Electronics Co., Ltd		www.kinghelm.net		DRAWING	CHECKED	APPROVED	TOLERANCES					
KH-AF90ZJ-10C		0755-83044319					X±0.10.XX±0.05.XXX±0.03		X±3.0°.X±2.0°.XX±1.0°			
							TITLE		USB Side Insertion 10.0 Brimless			
							DWG NO.					
X1		2007/06/29					PROJECTION		UNIT	SCALE	SHEET	REV
REV	ECN NO.	DATE	DRAWING	APPROVED					MM	1:1	1/1	X1