

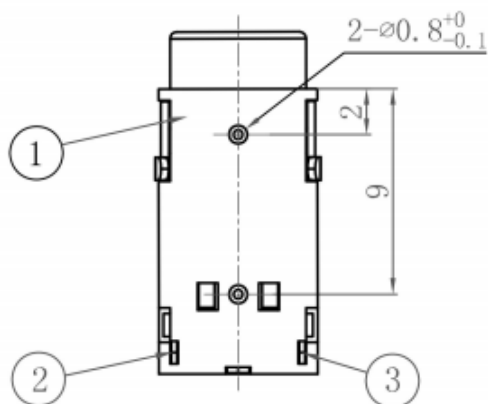



The PCB Hole Dimensions
TOP VIEW

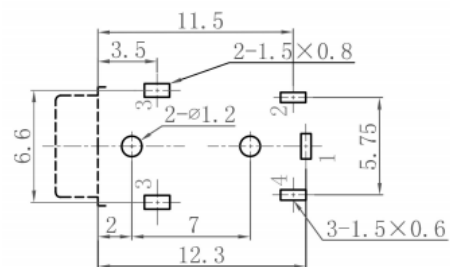

Circuit Diagram



TECHNICAL CHARACTERISTICS:

1. Operating Conditions: $-30^{\circ}\sim 70^{\circ}\text{C}$
2. Rated Load: DC 30V 0.5A
3. Control Resistance: ≤ 0.03
4. Insulation Resistance: $\geq 100\text{M}$ DC 250V
5. Dielectric Strength: AC 500V(50Hz)/min
6. Insertion Force: 3~20N
7. Service Life: 5000 times

General Tolerance						Shenzhen Kinghelm Electronics Co., Ltd		www.kinghelm.com.cn	
X.X ± 0.1						KH-PJ-322		0755-28190160	
X.XX ± 0.05						Model:			
X.XXX ± 0.005						Earphone jack PJ-322 pin configuration			
Angle Tolerance						Part Number:			
X. $^{\circ}$ $\pm 5.0^{\circ}$						Unit	Sheet	Scale	Rev
X.X $^{\circ}$ $\pm 3.0^{\circ}$						mm	1/1	4:1	A
X.XX $^{\circ}$ $\pm 1.0^{\circ}$									
5	Center Pin	Phosphor Bronze Strip T=0.25mm	1	Copper-tin					
4	Shell Pin	Phosphor Bronze Strip T=0.30mm	1	Copper-tin	REVISION				
3	Short Pin	Phosphor Bronze Strip T=0.25mm	1	Copper-tin	DRAWN 15-6/12				
2	Long Pin	Phosphor Bronze Strip T=0.25mm	1	Copper-tin	DES' D 15-6/12				
1	Base	PBT Engineering Plastic	1	Color Coding	CHK' D 15-6/12				
S/N	Name	Material	Quantity	Plating/Color	APP' D 15-6/12				