

Series: KH-RFID-PCB5213




Function Parameter:

RFID Agreement:	EPC Class1 Gen2, SO18000-6C
Frequency:	(ANSI)902-928MHz, (Euro-standard)865-868MHz
Chip:	Impinj Monza 4QT
Store:	EPC128bits, User Area 512bits, TID64bits
Number Of Writes:	100,000 Times
Function:	Read-write
Data Retention:	50 Years
Application surface:	Metallic Surface
Read Range: (Fixation Machine)	8.0 Meters, (ANSI)902-928MHz, Metallic Surface 8.2 Meters, (Euro-standard)865-868MHz, Metallic Surface
Read Range: (Hand Set)	4.9Meters, (ANSI)902-928MHz, Metallic Surface 5.1Meters, (Euro-standard)865-868MHz, Metallic Surface
Warranty:	1 Year


Physical Parameter:

Size:	52.0x13.0mm, (Hole: Diameter 3.0mm)
Thickness:	3.5mm
Material:	FR4 (PCB)
Color:	Black (optional red, blue, green, white)
Installation Method:	Back Glue Or Screws
Weight	5.5g


Size:

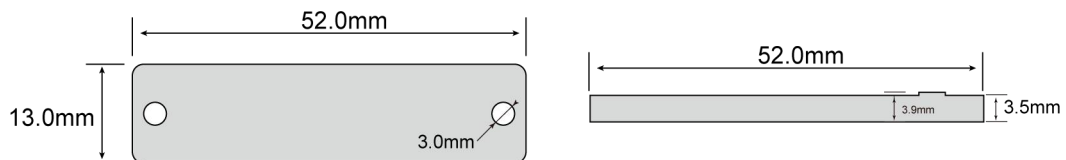

PCB5213U2 United States Frequency Standard:

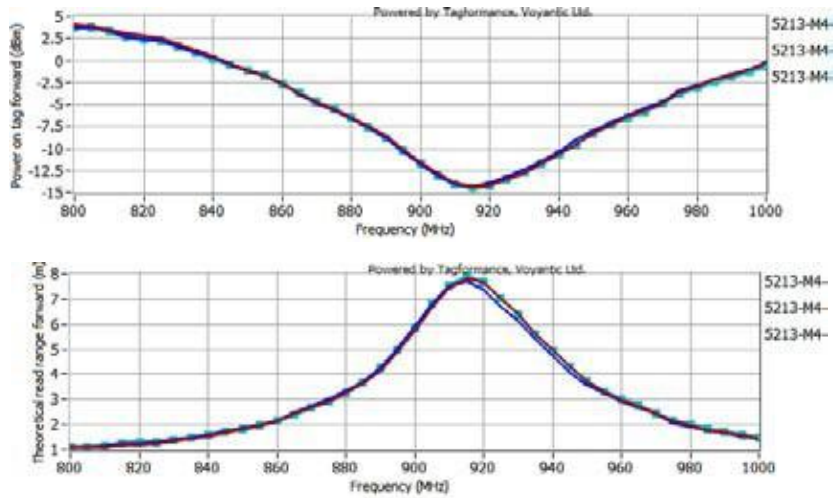

PCB5213E1 European Frequency Standard:

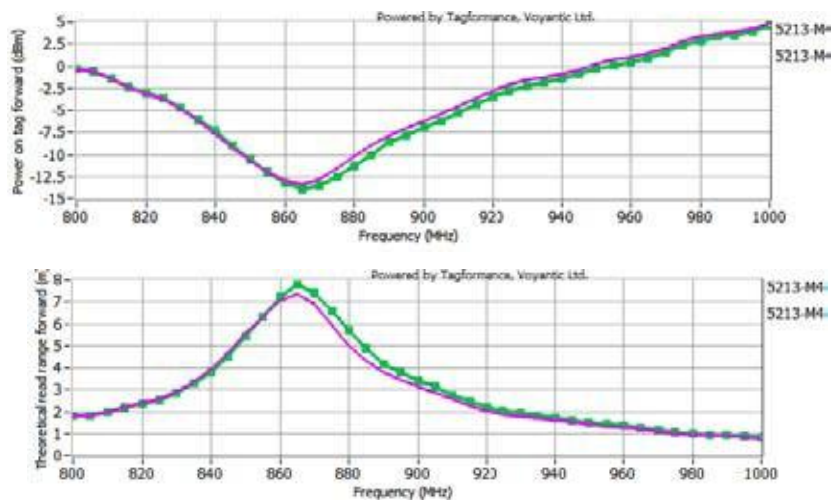

Environmental Specifications:

Dustproof & Waterproof:	IP68
Storage Temperature:	-40° To +150°
Working Temperature:	-40° To +100°
Authentication:	Reach Authentication, RoHS Authentication, CE Authentication

Order Information:

PCB5213U2:	(ANSI)902-928MHz
PCB5213E1:	(Euro-standard)865-868MHz