Kinghelm®

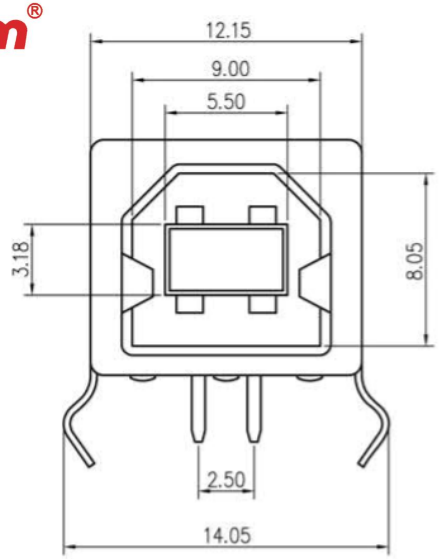

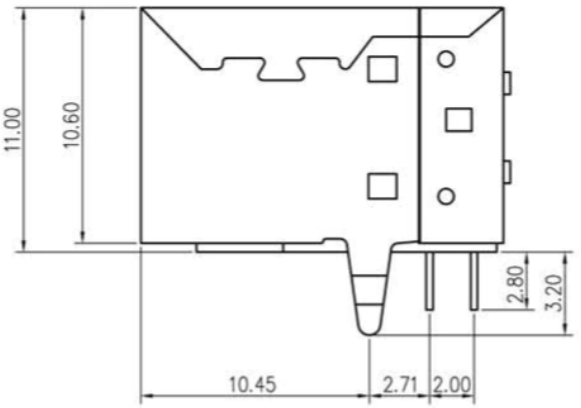

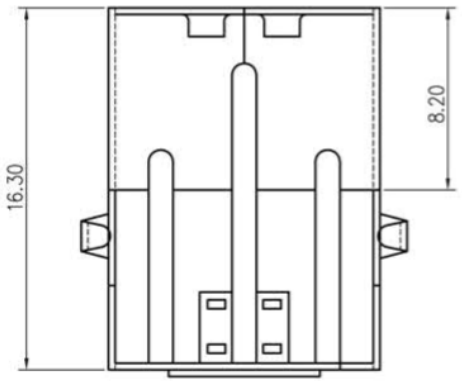

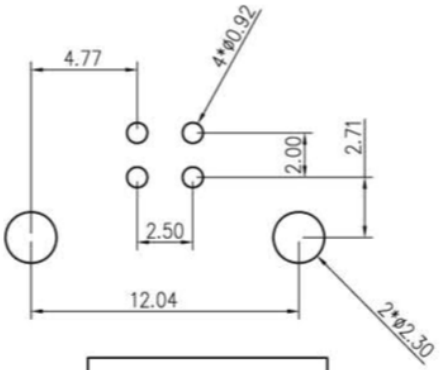

PCB.Layout

Notes:

Electricity:

Contact Resistance: 30mΩ (max)

Insulation Impedance: 1000MΩ (min)

High Pressure Resistance: 500VAC one minute

Material:

Rubber Core: PBT

Termina: Brass C2680

Shell: C2680/SPCC

Plating:

Terminal: Contact area gilding 1u"

Solder area is bright tinned 40u"min

Shell: Full area nickel plating 40u"min

91-US01-XXX

- 314:PBT White Iron Shell
- 315:PBT White Copper Shell
- 383:PBT Black Iron Shell
- 384:PBT Black Copper Shell

									TOLERANCE UNLNES OTHERTISE SPECIFIED .XXX ±.10 .XX ±.20 .X ±.30 . X° ±3°	PART NAME	90 DEGREES USB-BF	
REV	DESCRIPTION	REV BY	APPROVED	DATE	MATL	SFE SPECIFICATION			APPROVED		DWG.NO	See Table	C
					PROJECTION	THIRD ANGLE PROJECTION			CHECKED		Shenzhen Kinghelm Electronics Co., Ltd	www.kinghelm.net
					UNIT	SCALE	REV (NO)	SHEET	DRAWED	LT		
					mm	1:1	A	1 0F 1	DATE	2011.04.22	KH-USB BF-90	0755-28190160