


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

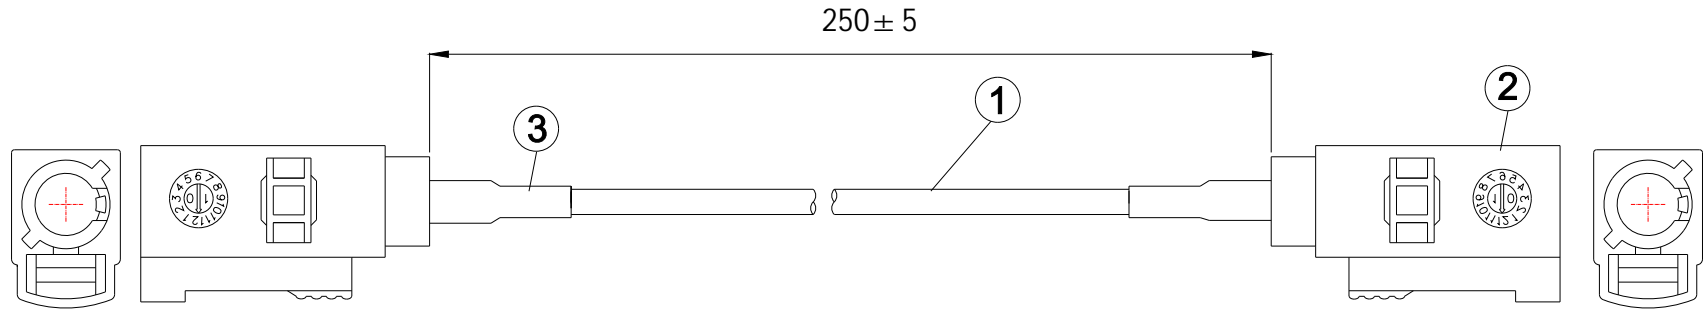

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
③	套管	黑色热缩套管, OD:3.5*15MM	2
②	接头	FAKRA接头母头母针,蓝色外壳, C型	2
①	同轴线	174同轴线 黑色外被,OD:2.8mm	AS

深圳市金航标电子有限公司		SHENZHEN KINGHELM ELECTRON CO.,LTD.	
WWW.KINGHELM.COM.CN		0755-28190160	
ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2024-06-17	KH-FAKRACK-FAKRACK-RG174-250M
	ENG. ALAN	2024-06-17	
COMPUTER GENERATED IN SOLIDWORKS	MFG. KEN	2024-06-17	
DO NOT SCALE THIS DRAWING	Q.A. TONY	2024-06-17	
PROJECTION	GENERAL TOLERANCE FOR ANGLES		SIZE Number
	± 1° ± 0±3 0.25 0.150		REV A
CUSTOMER P/N:		SCALE: Free TYPE	SHEET 1 OF 1

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.