
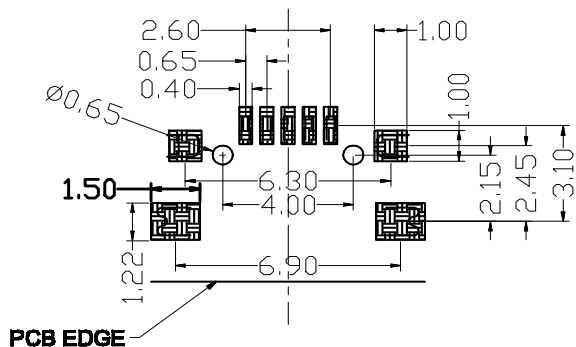
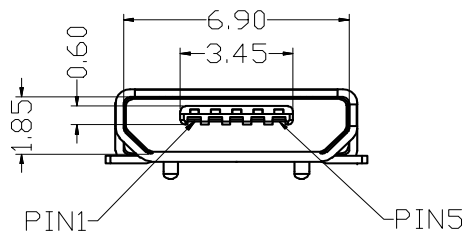





Kinghelm®

REV.	DESCRIPTION	DRAWN/DATE	APPROVED/DATE



RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

NOTES:

1. MATERIAL:
 - 1.1 HOUSING:THERMOPLASTIC FLAMMABILITY RATING UL94-0
 - 1.2 CONTACT:COPPERY ALLOY T=0.15MM
 - 1.3 SHELL: COPPERY ALLOY T=0.25MM
2. FINISH:
 - 2.1 CONTACT:
 - 3U"MIN,PLATED ON CONTACT AREA
 - G/F PLATING ON SOLDER TAIL AREA
 - 50~80U" NICKEL UNDERPLATING OVERALL
 - 2.2 SHELL:
 - 80~120U" MATTER TIN PLAING ALL
 - 50~80U" NICKEL UNDERPLATING OVERALL
3. SPECIFICATION:
 - 3.1 CURRENT RATING:0.5A(2.3.4CONTACT)/1.8A (1.5CONTACT)MAX.
 - 3.2 VOLTAGE:30 VAC
 - 3.3 TEMPERATURE RANGE:-30°C~85°C
 - 3.4 CONTACT RESISTANCE:30 MILLIONHM MAX.
 - 3.5 DIELECTRIC WITHSTANDING VOLTAGE;250VAC R.M.S
 - 3.6 INSULATION RESISTNACE:100 MEGOHMS MIN

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN ZQL	DATE	SHENZHEN KINGHELM ELECTRONIC CO., LTD.	WWW.BDS666.COM
X. ±0.35	X'. ±2.0°	CHECK ZQL	DATE	Model: KH-MICRO-SMT.MK-5P	0755-83044319
.X ±0.25	.X' ±1.0°	APPRO. ZQL	DATE	FILE NAME<??>	MICRO USB 5PIN SMT 5.5MM
.XX ±0.15	.XX' ±0.5°	UNIT:mm	SCALE 1:1	PART NO<??>	
.XXX ±0.10		A4	SHEET: 1 of 1	DRAWING NO<??>	REV. A0