

# Kinghelm®

REV.	DESCRIPTION	APPD	DATE
2/7	Adding an avoiding slot at the bottom of the slider		0112'10
3/7	Increase avoidance on the side of the main finger		0324'10

Model: **KH-SD2829-U**





NOTES:

- MATERIAL:  
HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V\_0,COLOR:BLACK.  
CONTACT: COPPER ALLOYS.  
COVER: COPPER ALLOYS OR STEEL.
- PLATING:  
UNDERPLATE: NICKEL.  
CONTACT AREA: GOLD OVER NICKEL.  
SOLDER AREA: TIN OVER NICKEL.
- MULTIMEDIA CARD COMPATIBLE

Instructions for Ordering:

P/N: SDPF1-EBS1-130X



- 1: The shell has holes
- 4: Hole-free housing

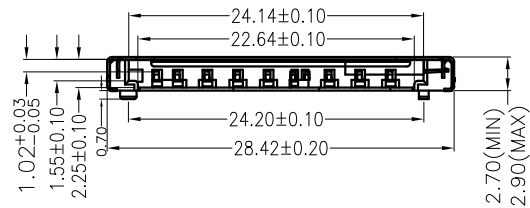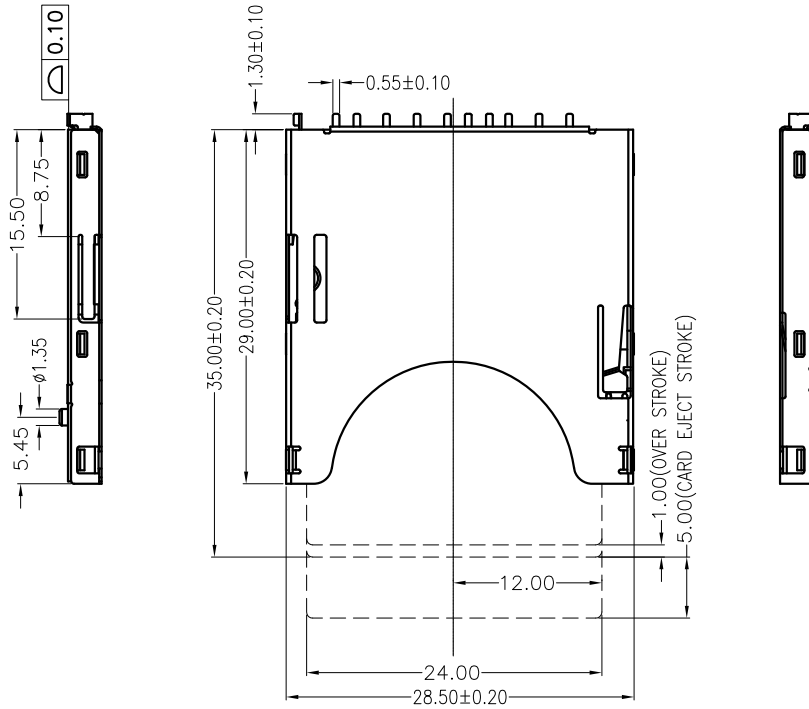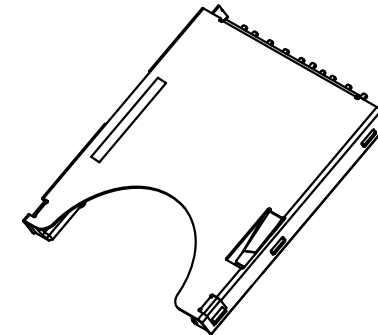

PART NO: SDPF1-EBS1-131X		MATERIAL:	KINGHELM	WWW.BDS666.COM
LOT NO: X1XXX00110		FINSH:		0755-83044319
UNIT: MM	SIZE: A4	COLOR:	TITLE: SD PUSH- Card Base	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		GENERAL ANGLE: X.X=±5.0° X.XX=±3.0°	DR:	DWG NO:
			CHK:	SCALE: 1:1
			APP:	SHEET: 1 OF 3
				REV: B/3




# Kinghelm®

REV.	DESCRIPTION	APPD	DATE

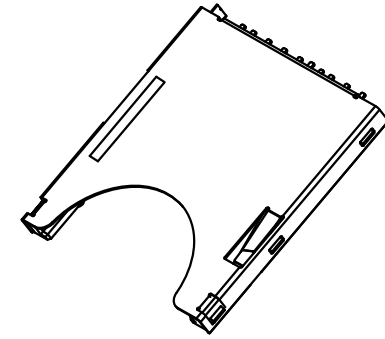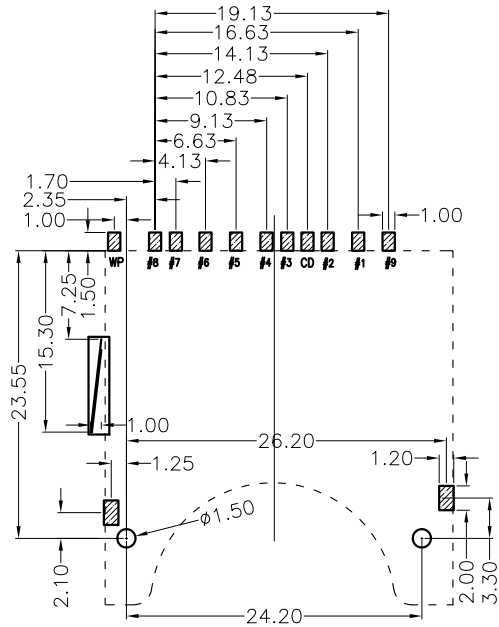

## SD CARD PIN DESIGN

PIN NO.	NAME	TYPE	DESCRIPTION
#1	CD/DAT3	I/O/PP	CARD DETECT/DATA LINE(BIT3)
#2	CMD	PP	COMMAND/RESPONSE
#3	VSS1	S	SUPPLY VOLTAGE GROUND
#4	VDD	S	SUPPLY VOLTAGE
#5	CLK	I	CLOCK
#6	VSS2	S	SUPPLY VOLTAGE GROUND
#7	DAT0	I/O/PP	DATA LINE(BIT 0)
#8	DAT1	I/O/PP	DATA LINE(BIT 1)
#9	DAT2	I/O/PP	DATA LINE(BIT 2)




PART NO: SDPF1-EBS1-131X		MATERIAL:		KINGHELM		WWW.BDS666.COM	
LOT NO: X1XX100110		FINISH:				0755-83044319	
UNIT: MM	SIZE: A4	COLOR:		TITLE: SD PUSH- Card Base			
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		GENERAL ANGLE: X.X=±5.0° X.XX=±3.0°		DR:	DWG NO:		REV: B/3
		CHK:	APP:		SCALE: 1:1	SHEET: 2 OF 3	

# Kinghelm®

REV.	DESCRIPTION	APPD	DATE

40PCS per plate

Blister disc

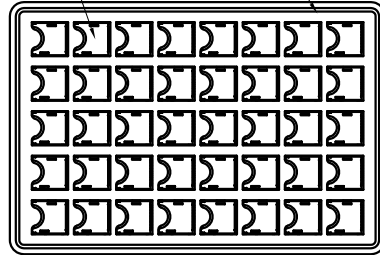


Blister disc specification: 320\*215\*10

NO. 1

Protective film

Top cover


25 floors(100pcs)

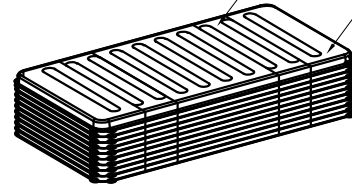

NO. 2

Adhesive paper sealing box

Finished product label




Carton specification: 340\*240\*150

NO. 4

One case per 1000PCS

Carton

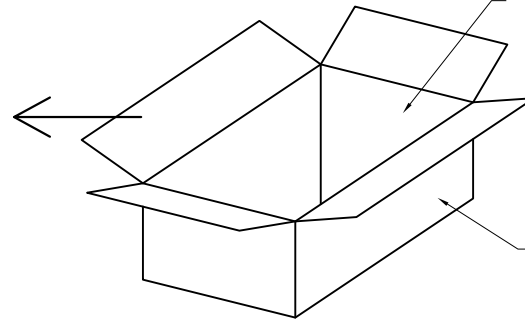

NO. 3

1. Material requirements:

1.1 The material of carton is B=B; The overall dimension is 34\*24\*15CM;;  
1.2 The material of PS disk is PS, and the overall dimension of PS disk is 320\*215\*1 0MN;;

2. Packaging requirements:

2.1 40PCS per plate;

2.2 Every 25 discs are stacked together, totaling 1Kset; You need to put an empty plate on it.

Then winding with PE film;

2.3 Put the stacked PS trays into the carton;

2.4 Packing and sealing the packaged finished products and labeling them in the carton;

PART NO: SDPF1-EBS1-131X		MATERIAL:		KINGHELM		WWW.BDS666.COM	
LOT NO: X1XX100110		FINSH:				0755-83044319	
UNIT: MM	SIZE: A4	COLOR:		TITLE: SD PUSH Card Base			
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		GENERAL ANGLE: X.X=±5.0° X.XX=±3.0°		DR: 杨凯 08/26/09	DWG NO: FP-090015		REV: B/3
APP:		SCALE: 1:1		SHEET: 3 OF 3			