


| | |
|------------|-------------------|
| CUSTOMER : | Customer Part NO. |
| | Part Descripon |

| Item | Specification |
|----------------------------|--------------------|
| NO. of conductors | N 6P-96P |
| Pitch | P 0.5 ± 0.05 |
| Total Pitch | PT 2.5-47.5 ± 0.08 |
| Total Length | L 25-20000 ± 2 |
| Insulation Length | IL 25-20000 ± 2 |
| Margin Width | M 0.5 ± 0.08 |
| Total Width | W 3.5-48.5 ± 0.08 |
| Strip Length | S1 1.5-5 ± 0.5 |
| Strip Length | S2 1.5-5 ± 0.5 |
| Reinforeing tape length | B1 2.5-30 ± 2 |
| Reinforeing tape length | B2 2.5-30 ± 2 |
| Slanting | A ≤ 0.3 |
| Over lap | / |
| Terminal thickness | t1 0.3 ± 0.02 |
| Thickness insulation | t 0.12 ± 0.02 |
| Conductor thickness | Ct 0.035 ± 0.01 |
| Conductor width | Cw 0.3 ± 0.03 |
| Supporting Tape Color | Blue |
| PET(Supporting Tape Color) | 0.225mm |
| PET(Insulation) | 0.043mm Printing |
| PET(Insulation) | 0.043mm White |
| Rev | B |

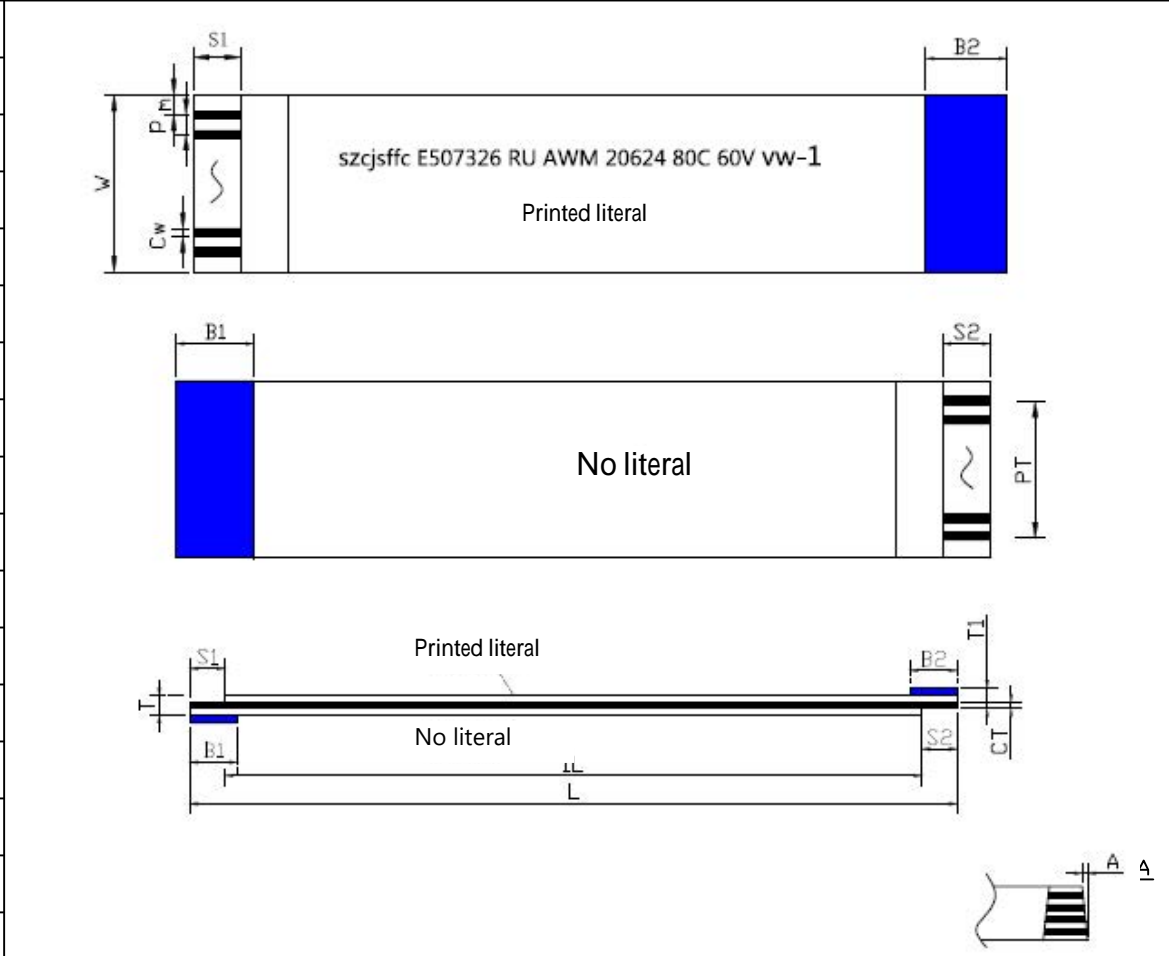

| | | | |
|--|--|-------------------|----------------|
| Storage condition :Recommended: | | | |
| Temp:15° C~25° C | | Humidity:30~60RH% | |
| Drawing Not TO Scale Hidden Lines Not Shown | Discharge Date | Review Date | Drawing NO |
| | 2021-05-19 | | |
| | SHENZHEN KINGHELM ELECTRONIC CO., LTD. | | WWW.BDS666.COM |
| | KH-FFC-V0.5-10P-100MM | | 0755-83044319 |