
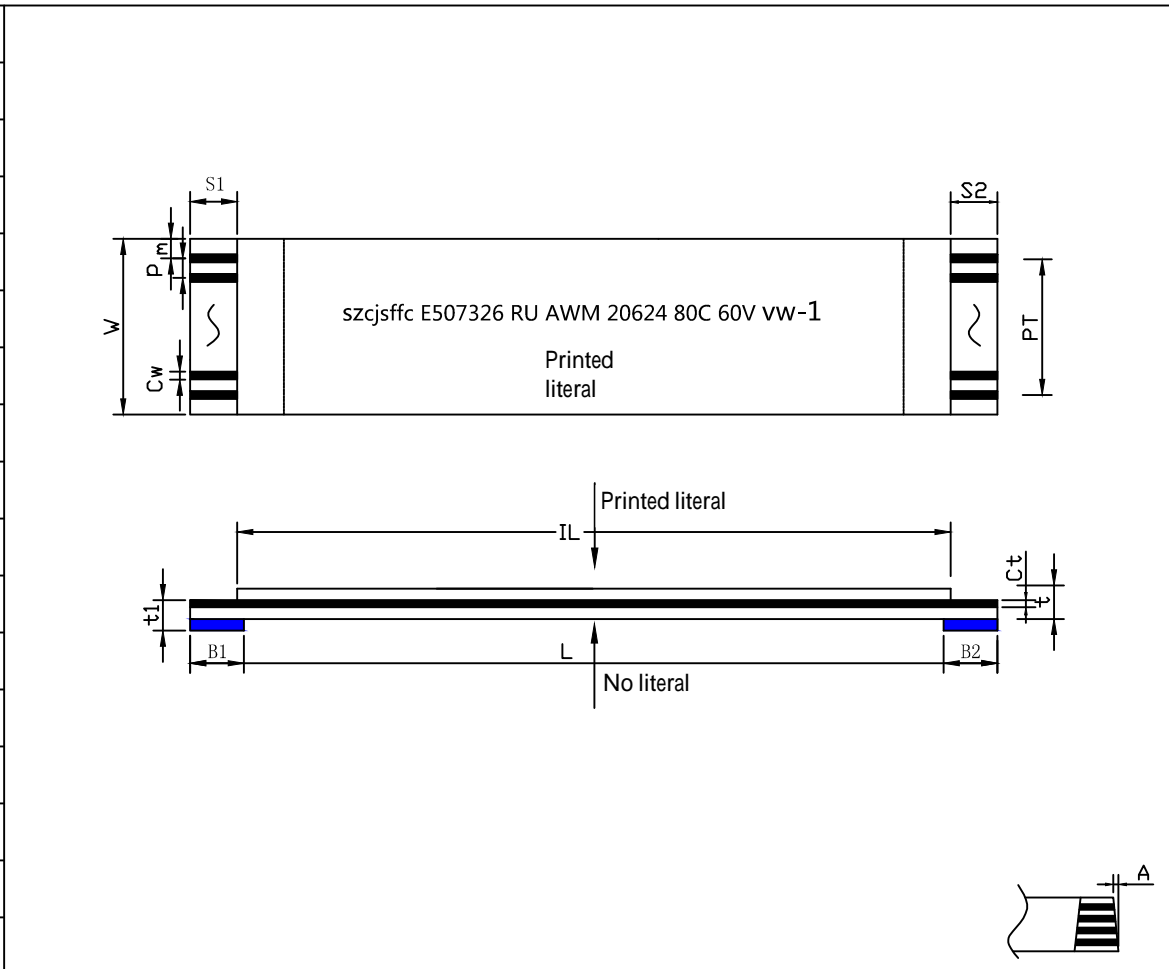


CUSTOMER :	Customer Part NO.
	Part Descripon

Item	Specification
NO. of conductors	N 6P-96P
Pitch	P 1.0 ± 0.08
Total Pitch	PT $3-95 \pm 0.1$
Total Length	L $25-20000 \pm 2$
Insulation Length	IL $25-20000 \pm 2$
Margin Width	M 1.0 ± 0.1
Total Width	W $5-97 \pm 0.1$
Strip Length	S1 $1.5-5 \pm 0.5$
Strip Length	S2 $1.5-5 \pm 0.5$
Reinforeing tape length	B1 $2.5-30 \pm 2$
Reinforeing tape length	B2 $2.5-30 \pm 2$
Slanting	A ≤ 0.3
Over lap	/
Terminal thickness	t1 0.3 ± 0.02
Thickness insulation	t 0.12 ± 0.02
Conductor thickness	Ct 0.035 ± 0.01
Conductor width	Cw 0.65 ± 0.03
Supporting Taped Color	Blue
PET(Supporting Taped Color)	0.225mm
PET(Insulation)	0.043mm Printing
PET(Insulation)	0.043mm White
Rev	A



Storage condition :Recommended:			
Temp:15° C~25° C		Humidity:30~60RH%	
Drawing Not TO Scale Hidden Lines Not Shown	Discharge Date	Review Date	Drawing NO
	2021-05-19		
	SHENZHEN KINGHELM ELECTRONIC CO., LTD		WWW.BDS666.COM
	KH-FFC-A1.0-8P-100MM		0755-83044319